

SERVICE MANUAL

AKAI TAPE DECK

MODEL

X-150D

TABLE OF CONTENTS

I	SPECIFICATIONS	1
II	MEASURING METHOD	2
III	LOCATION OF CONTROLS	4
IV	DISASSEMBLY OF TAPE TRANSPORT UNITS & AMPLIFIERS	5
V	TRANSPORT MECHANISM	7
VI	MECHANISM ADJUSTMENT	10
VII	AMPLIFIER ADJUSTMENT	12
VIII	MAINTENANCE PROCEDURES	14
IX	REPLACEMENT PARTS TABLE	15
X	EXPLODED VIEW OF COMPONENT PARTS	18
XI	TROUBLE SHOOTING CHART	25
XII	SCHEMATIC DIAGRAM	29
XIII	CONNECTING DIAGRAM	30

I. SPECIFICATIONS

STYLE	: Portable	MIC. INPUT	: 0.5 mV~20 mV
WEIGHT	: 30.8 lbs (14.0 kg)	DIN. INPUT	: 20 mV~25 mV
DIMENSIONS	: 13-1/2" (H) × 13-1/2" (W) × 9" (D) (340 H × 340 W × 230 D mm)	MONITOR	
POWER		SYSTEM:	Can be monitored the program being recorded by using. Stereo headphone (8 Ohms) ... Stereo headphone jack Crystal receiver Line output jack.
SUPPLY	: 100, 110, 120, 200, 220, 240 V.A.C.	MOTOR	
RECORDING		: Hysteresis synchronous 2-speed motor.	
SYSTEM:	Inline 4-track stereo, monaural playback.	Horse power	: 1/100 HP
TAPE SPEED	: 3 speeds.....1-7/8, 3-3/4 and 7-1/2 ips (15 ips optional)	Power ratio	: 85%
TAPE SPEED		Revolution	: 3,000 to 1,500 R.P.M. at 50 cps (Hz) 3,600 to 1,800 R.P.M. at 60 cps (Hz)
DEVIATION:	Less than ±1.5% at all tape speeds.	Condenser capacity	: 2.8 μ F at 50 cps (Hz) 2.0 μ F at 60 cps (Hz)
WOW AND		HEADS	
FLUTTER:	Less than 0.15% R.M.S. at 7-1/2 ips.	RECORDING/	
(PLAYBACK	Less than 0.25% R.M.S. at 3-3/4 ips.	PLAYBACK	
ONLY)	Less than 0.35% R.M.S. at 1-7/8 ips.	HEAD:	Inline 4-track stereo/monaural Gap 0.2 microns Impedance ... 1,000 Ohms at 1,000 cps (Hz)
FREQUENCY		BIAS HEAD	: Inline 4-track stereo Gap 0.2 mm Impedance 500 Ohms at 60 Kc
RESPONSE:	30 to 23,000 cps (Hz) at 7-1/2 ips. 30 to 18,000 cps (Hz) at 3-3/4 ips. 30 to 9,000 cps (Hz) at 1-7/8 ips.	ERASE HEAD:	Inline 4-track stereo. Gap 0.2 mm Impedance 300 Ohms at 60 Kc
SIGNAL TO		RECORD LEVEL	
NOISE RATIO:	Better than 50 db.	INDICATOR:	Vertical indication Model "A" VU meter × 2
DISTORTION	: Within 2% at 1,000 cps (Hz) recording. (TOTAL HARMONICS)	TRANSISTOR	
CROSS-TALK	: Less than -65 db (Monaural) Less than -43 db (Stereo)	USED:	2SC650 (A) × 4 2SC281 (B) × 4 2SC458 (B) × 2 2SC696 (J) (I) (F)
INSULATION		SILICON	
RESISTANCE:	More than 50 M.Ohms.	DIODE USED:	SW-05-01 × 5
INSULATION		REELS USED	: 7", 5", 3" reels
DURABILITY:	1,000 V.A.C. for more than one minute duration.		
ERASE RATIO	: Less than -70 db for all tracks.		
POWER CON-			
SUMPTION:	55 VA		
EQUALIZA-			
TION:	Correct equalization for playback of tapes recorded to the NAB curve.		
FAST FORWARD			
AND REWIND			
TIME:	90 seconds using 1,200 feet tape at 50 cps (Hz); 75 seconds at 60 cps (Hz).		
OUTPUT			
LEVEL:	1.228 V (0 VU) at using 1,000 cps (Hz) 0 VU recorded tape.		
OUTPUT			
IMPEDANCE:	1.5 K.Ohms		
OUTPUT LEVEL			
OF STEREO			
HEADPHONE:	30~40 mV		
OUTPUT			
IMPEDANCE OF			
STEREO			
HEADPHONE:	8 Ohms		
INPUT LEVEL			
LINE INPUT	: 50 mV~2.5 V		

II. MEASURING METHOD

TAPE SPEED DEVIATION

1. Method involving use of pre-recorded tape.

Playback on the tape recorder to be tested tape pre-recorded at 1,000 cps $\pm 0.1\%$ for measuring tape speed deviation. Connect the appropriate output to a frequency counter meter in order to measure the tape speed deviation from the resulting deviation of the measured frequency.


2. Method involving use of timing tape (designed for tape speed measurement).

This method utilizes a timing tape marked at intervals of $7\frac{1}{2}''$. The running time of the tape over 60 marked section is measured in order to calculate the deviation of the tape speed. In application of this method, however, it should be borne in mind that should the timing tape stretch or contract, measurement error is inevitable, so that it is necessary to measure the total length of the tape in advance.

WOW AND FLUTTER

Playback the 3,000 cps pre-recorded tape whose wow and flutter level is guaranteed to be smaller than 0.07% for measurement by means of a wow meter. It is also possible for a 3,000 cps sine wave to be recorded and played for measurement by means of the wow meter. In this case, however, the wow meter indicates a value as much as twice the value given in the specification on the first page.


SIGNAL TO NOISE RATIO

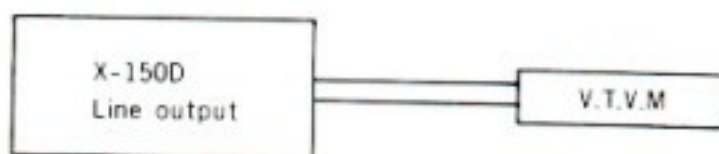

Set the Equalizer Switch on " $7\frac{1}{2}$ ips" position and playback a tape containing a 1,000 cps sine wave recorded at "0" VU level on a standard recorder. Connect a V.T.V.M. to the line output jack of the recorder and measure its output.

Then remove the tape and measure the noise level under the same condition. Convert into decibels each of the measured values.

TOTAL HARMONIC DISTORTION FACTOR

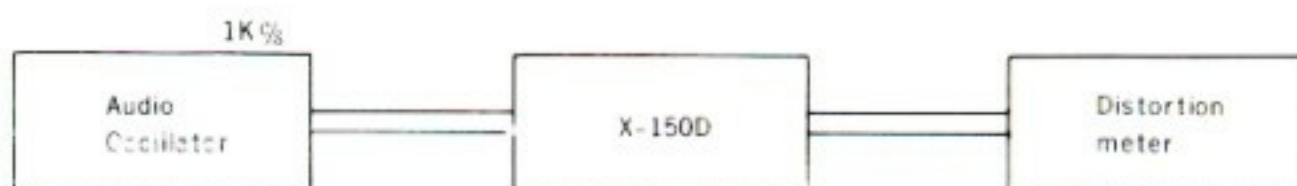

Connect the measuring instrument as shown above, and record the 1,000 cps sine wave at "0" VU. Playback the resultant signal and measure the overall distortion factor. Measure the noise level of the tape recorder with the tape removed: connect the audio oscillator directly to the distortion meter for measurement of the distortion factor of the oscillator.

The required distortion factor may be obtained from the results of the above measurement by the following formula.

$$d_0 = d - d_1 - d_2$$

where, d_0 = Required

d = Overall distortion factor

d_1 = Noise level

d_2 = Distortion factor of the oscillator

(Note: New tape of particularly good quality should be used for measurement of the distortion factor).

POWER OUTPUT

Playback a tape containing a sine wave of 1,000 cps recorded at 0 VU on a standard recorder.

Connect a V.T.V.M. to the line output jack of the recorder and measure the voltage at the output of the recorder to be tested.

CROSS TALK (Cross talk between the tracks)



As shown in the figure, first record a 1,000 cps sine wave on track No. 3 at +3 VU level. Next, remove the 1,000 cps input signal and record under a non-input condition.

Then, playback the tape on track No. 3 and No. 1 (reversed condition of tape) through the 1,000 cps B.P.F. (Band Pass Filter, Sensitivity,...1:1) and obtain a ratio between the two from the following formula.

$$C = 20 \log \frac{E_0}{E_2 - E_1} \text{ (db)}$$


C = Desired cross talk ratio (db)

E_0 = 1,000 cps signal output level

E_2 = 1,000 cps cross talk output level

E_1 = No-input signal record level

FREQUENCY RESPONSE

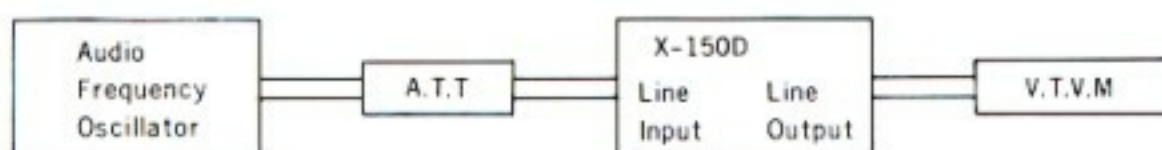

Connect the measuring instrument as in the above diagram, and measure the frequency response in the following sequence :




RECORD :

- 1) Give a sine wave of 1,000 cps to the Line Input of the recorder to be tested through an attenuator from an audio frequency generator.
- 2) Set the Record/Playback Knob in to "Rec" position and adjust the line input volume so that the VU meter needle indicates "0" VU.
- 3) Under the condition described in (2), lower the input level 10 db by means of the attenuator.
- 4) Record the spot frequency in the range of 30 cps to 25,000 cps from the audio frequency generator.

PLAYBACK :

- 5) Set the Record/Playback Knob in to "Play" position.
- 6) Set the Equalizer Switch on 7-1/2" or 3-3/4" position.
- 7) Connect a V.T.V.M. to the Line output.
- 8) Playback the tape previously recorded.
- 9) Adjust the output level to "0" dbm at 1,000 cps as indicated on the V.T.V.M. by the range selector of a V.T.V.M.
- 10) Playback the recorded spot frequencies with the conditions in (9); make a memo of output level and plot the value on a graph.


III. LOCATION OF CONTROLS

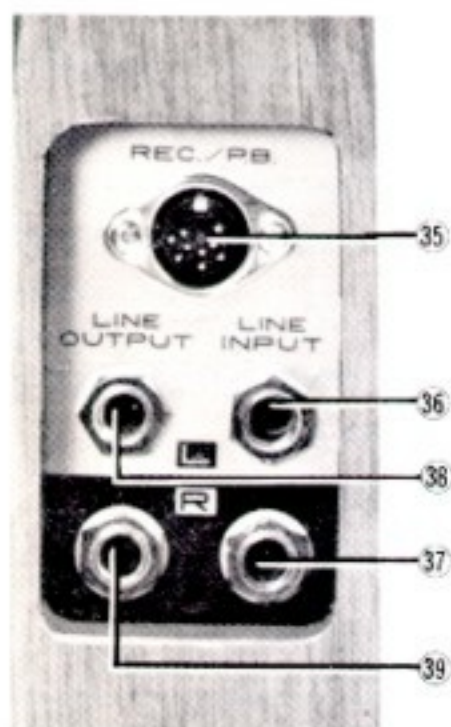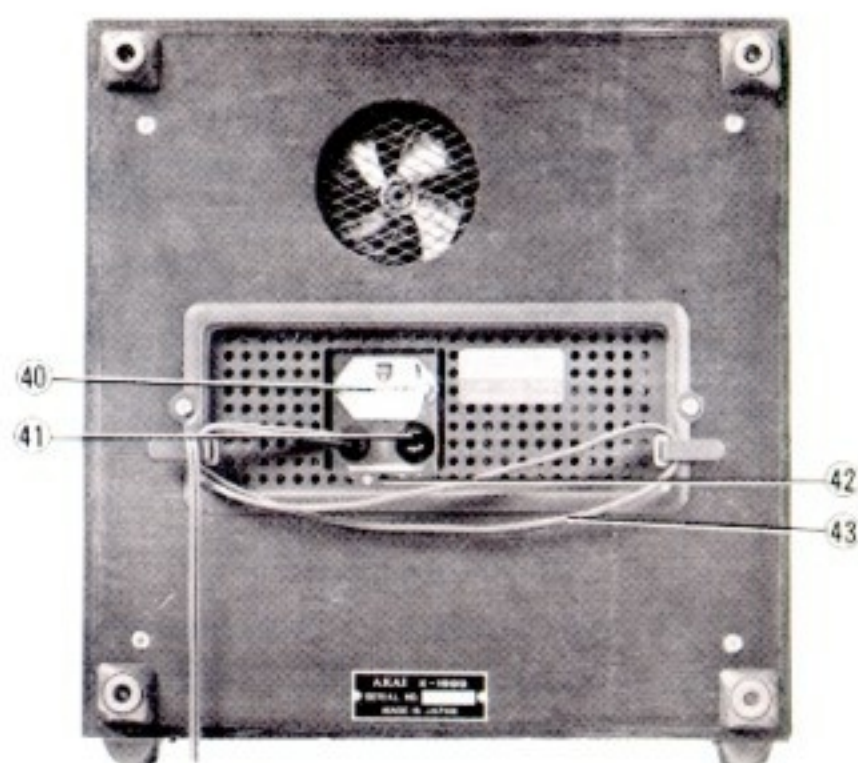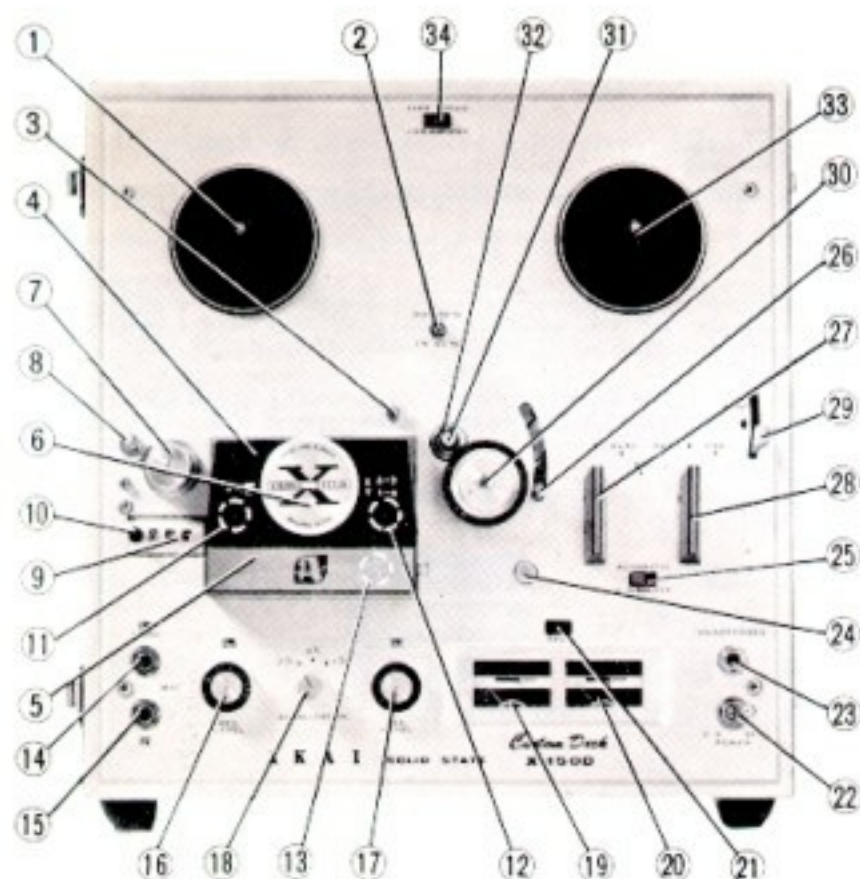


- | | |
|--|--------------------------------|
| ① Supply Reel Shaft | ②② Power Switch |
| ② Cycle Conversion Switch (A) | ②③ Stereo Headphone Jack |
| ③ Capstan Storage Post | ②④ Recording Safety Button |
| ④ Head Cover (A) | ②⑤ AS Switch |
| ⑤ Head Cover (B) | ②⑥ AS Lever |
| ⑥ Track Selector Knob | ②⑦ Record/Playback Knob |
| ⑦ Tape Guide | ②⑧ Fast-Forward/Rewind Knob |
| ⑧ Tape Cleaner | ②⑨ Instant Stop Lever |
| ⑨ Index Counter | ③⑩ Pinch Wheel |
| ⑩ Reset Button | ③⑪ Capstan Shaft |
| ⑪ Erase Head | ③⑫ Capstan |
| ⑫ Recording/Playback Head | ③⑬ Take-Up Reel Shaft |
| ⑬ Bias Head | ③⑭ Speed Change Switch |
| ⑭ Microphone Jack (Left) | ③⑮ DIN Jack |
| ⑮ Microphone Jack (Right) | ③⑯ Line Input Jack (Left) |
| ⑯ Recording Level Control Knob (Left) | ③⑰ Line Input Jack (Right) |
| ⑰ Recording Level Control Knob (Right) | ③⑱ Line Output Jack (Left) |
| ⑱ Equalizer Knob | ③⑲ Line Output Jack (Right) |
| ⑲ VU Meter (Left) | ④① Voltage Conversion Switch |
| ⑲ VU Meter (Right) | ④② Fuse Post |
| ⑲ Recording Lamp | ④③ Cycle Conversion Switch (B) |
| | ④④ AC Cord |

IV. DISASSEMBLY OF TAPE TRANSPORT UNIT & AMPLIFIERS


- (1) Loosen the RETAINING SCREW (a) of PINCH WHEEL (b) using a phillips-headed screw driver and remove the PINCH WHEEL by hand.

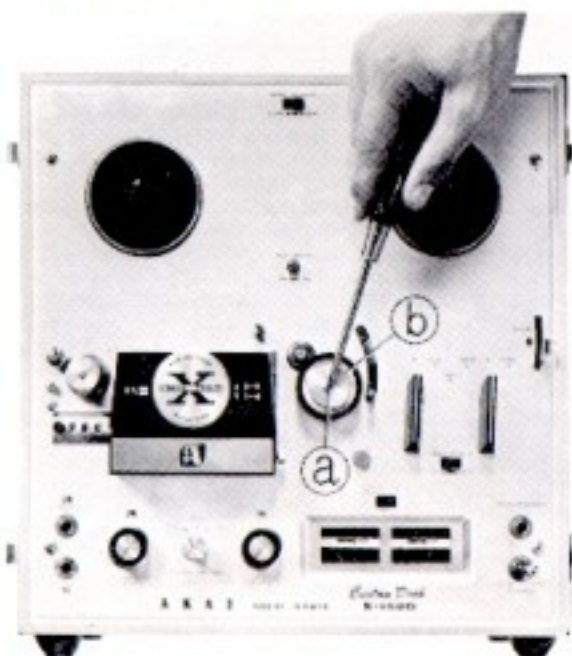


- (2) Loosen the RETAINING SCREW (a) of the TRACK SELECTOR KNOB (b) using a phillips-headed screw driver and remove the TRACK SELECTOR KNOB by hand.

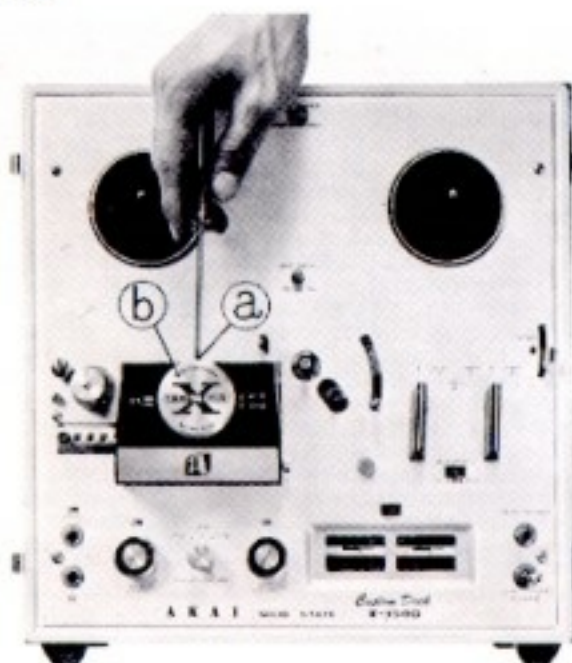


- (3) Loosen the RETAINING SCREWS of the KNOBS (a, b and c) by using a minus-headed screw driver and remove the KNOBS by hand.

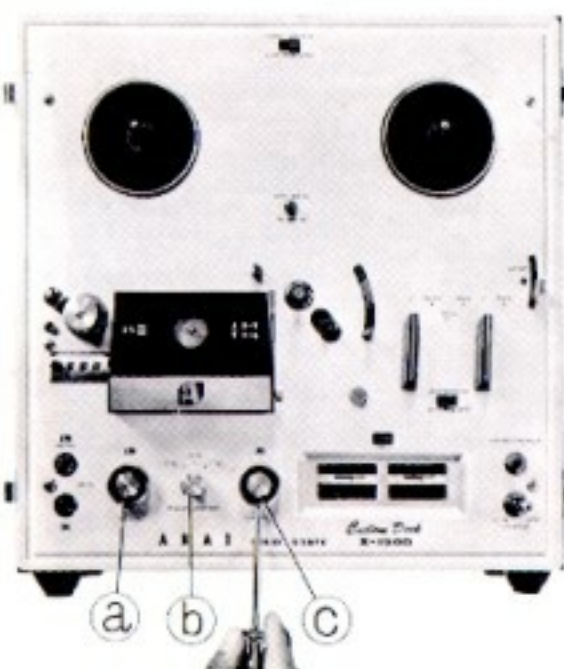


- (4) Loosen the RETAINING SCREWS of the DECK CONTROL KNOBS (a) and (b) by using a phillips-headed screw driver and remove the KNOBS by hand.

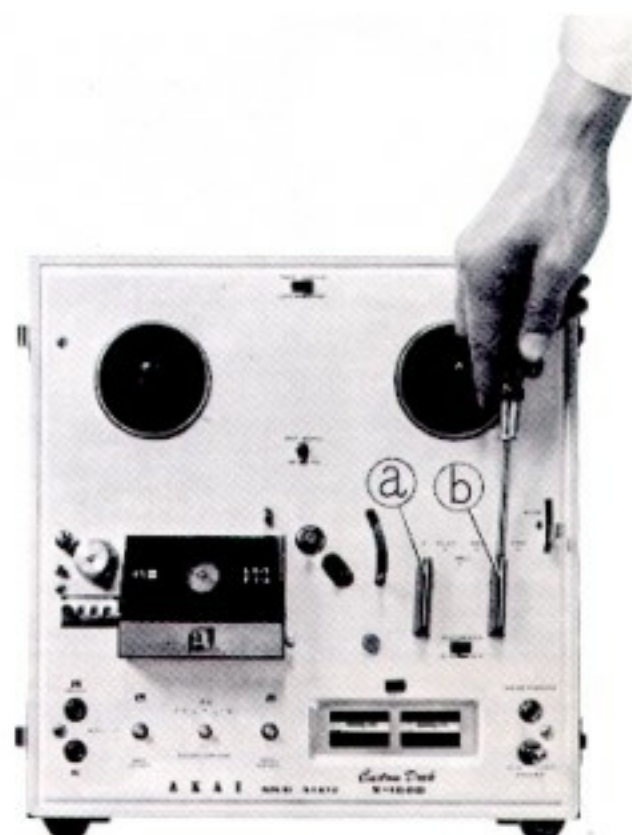

- (5) Loosen the SCREWS (marked from a to d) by using a phillips-headed screw driver and remove the DECK PANEL by hand.

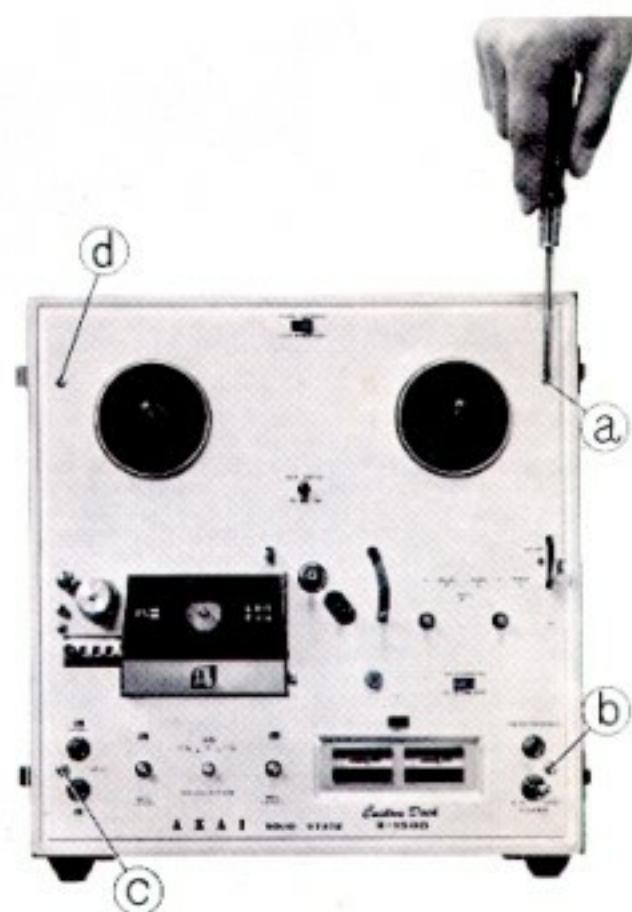

- (6) Loosen the SCREWS (marked from ㉑ to ㉔) by using a phillips-headed screw driver.

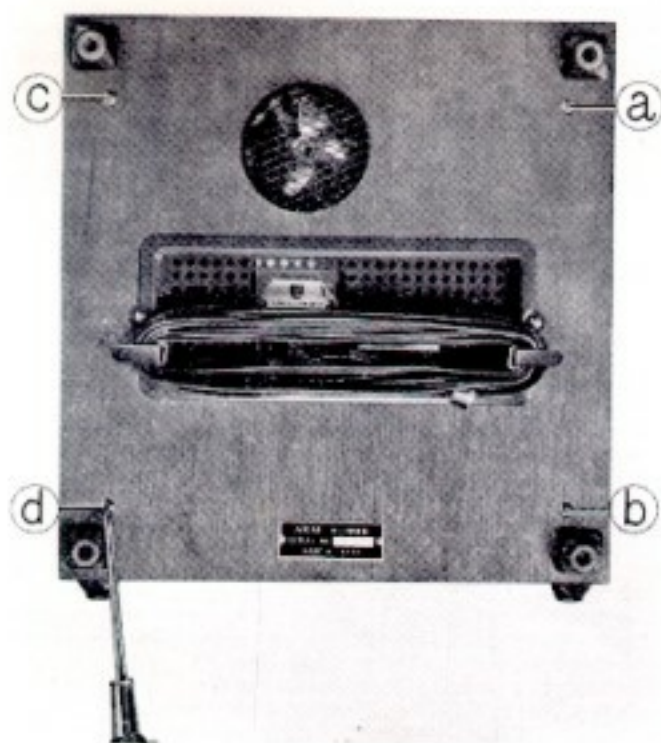


- (7) Loosen the SCREWS (marked from ㉑ to ㉔) by using a phillips-headed screw driver.



- (8) Remove the TAPE TRANSPORT MECHANISM ASSEMBLY and AMPLIFIER ASSEMBLY ㉑ by slowly lifting it from the CASE ㉒ as shown in picture.



- (9) Disconnect the PLUGS (marked ㉑ to ㉔) carefully by hand.

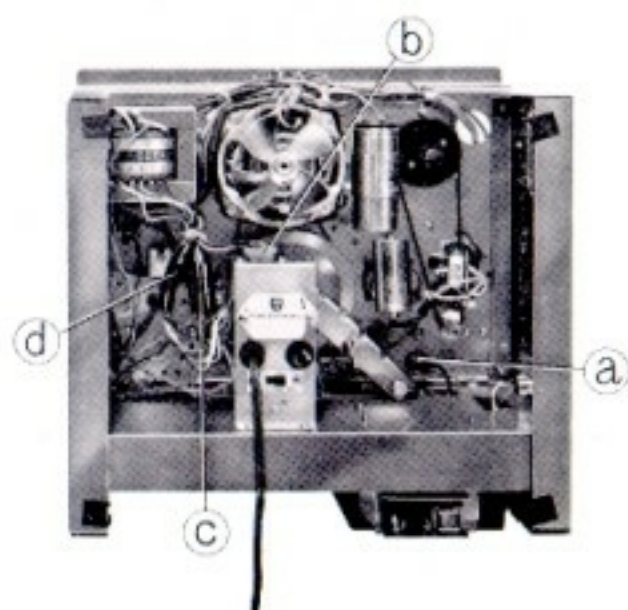

- (10) Loosen the SCREWS (marked from ㉑ to ㉔) of the DECK FRAME by using a phillips-headed screw driver.



- (11) Separate the TAPE TRANSPORT MECHANISM ASSEMBLY ㉑ from AMPLIFIER ASSEMBLY ㉒ carefully by hand.



V. TRANSPORT MECHANISM

Driving of Capstan

Figure 1.

- (A) Motor
 (B) Driving Belt (flat belt)
 (C) Capstan
 (D) Flywheel

High-speed rotation of *Motor* ① is reduced by *Driving Belt* ② and transmitted to Capstan ③, which is connected of flywheel with ample inertia and enables rated rotation by absorbing minor rotation distortion of motor itself.

Capstan Rotation :

606 R.P.M. at 7-1/2" (19 cm) per sec.
303 R.P.M. at 3-3/4" (9.5 cm) per sec.
151.5 R.P.M. at 1-7/8" (4.75 cm) per sec.

Motor Rotation :

3,000 to 1,500 R.P.M. at 50 cps.
3,600 to 1,800 R.P.M. at 60 cps.

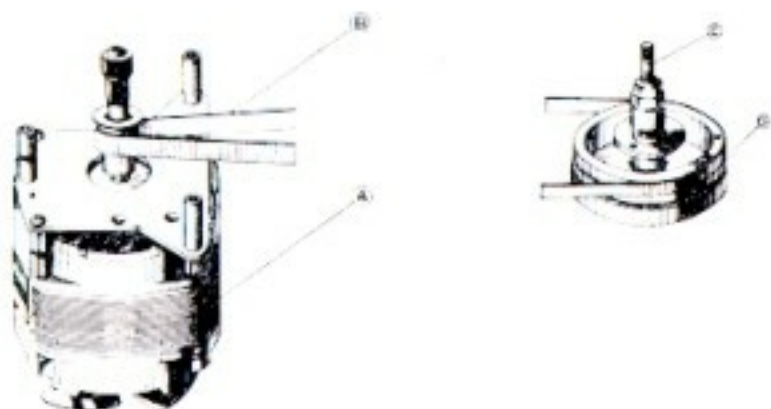


Fig. 1

Driving of Pinch Wheel

Put tape between rotating capstan and pinch wheel and push pinch wheel against capstan, this will transport the tape at rated speed. The appropriate pressure of pinch wheel is between 1,000 to 1,150 grams at the tape speed of 7-1/2" (19 cm) per second.

Recording and Playback

Turn the *RECORD/PLAYBACK KNOB* ㉔ to "PLAY" position, and pinch wheel presses against capstan to move tape at the rated speed. At the same time, *Idler* ㉕ moves between *Motor Bushing* ㉖ and the *Take-Up Reel Spindle* ㉗ to transmit the motor rotation to ㉗ so that the tape is moved and wound on the take-up reel.

The Take-up Reel Spindle Base is made up of two plastic rollers (1 and 2) with a clutch felt in between. The Idler is rotating *the plastic roller* (2) under. Therefore, the tape-winding friction is adjusted by the slipping of the felt to enable rated winding of the tape.

On the other hand, the *Supply Reel Spindle* ⑪ has a *Brake Roller* ⑥ hung on the *Plastic Roller* ④ under which provides appropriate back tension by the clutch felt slipping to the rotation of the *Pulley* ③ above.

To prevent accidental erasure, the *Record Interlock Button* ⑤ must be depressed before the RECORD/PLAYBACK KNOB can be moved to the "REC" position. The *Safety device* ⑥ is depressed to enter the record mode.

(See figure 2)


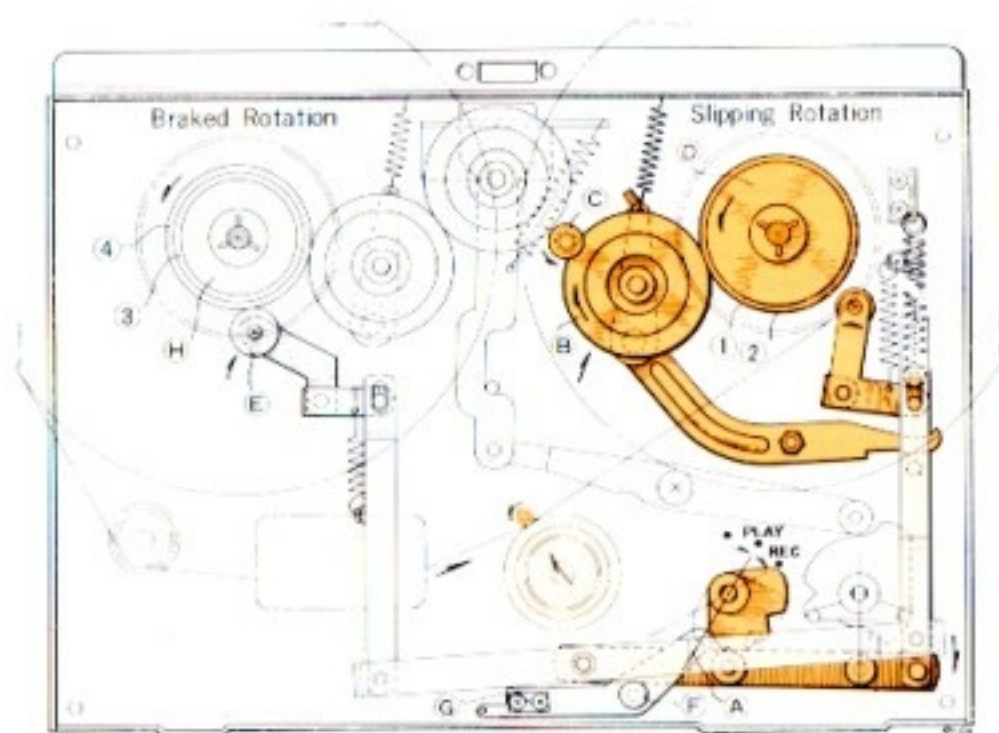


Fig. 2

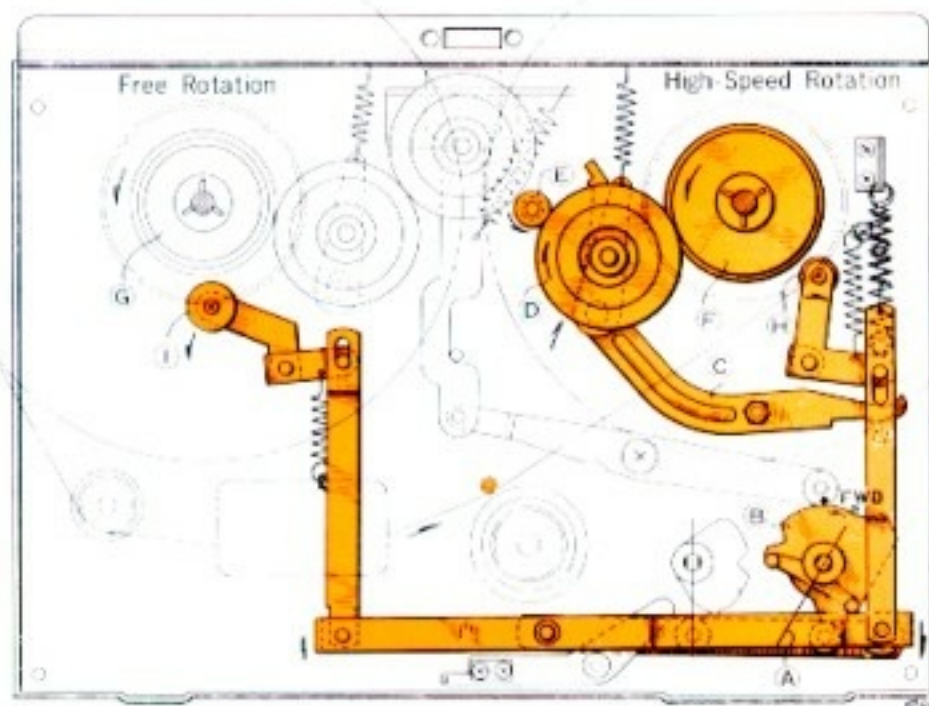


FAST-FORWARD MECHANISM

Turn the *FAST FWD-REWIND knob* (A) to "FAST FWD" position, and the *cam* (B) under the knob pushes up the *Lever* (C). The *Idler* (H) moves into the space between the *Plastic Roller* (F) above the *Take-Up Reel Spindle* and the upper part of the rotating motor drive bushing to transmit the motor rotation to the take-up reel spindle. At the same time, *Brake Rollers* (I) and (J) come off the reel spindle to free the *Supply Reel Spindle* (G), thereby allowing fast winding of the tape onto the take-up reel.

(See figure 3)

Fig. 3

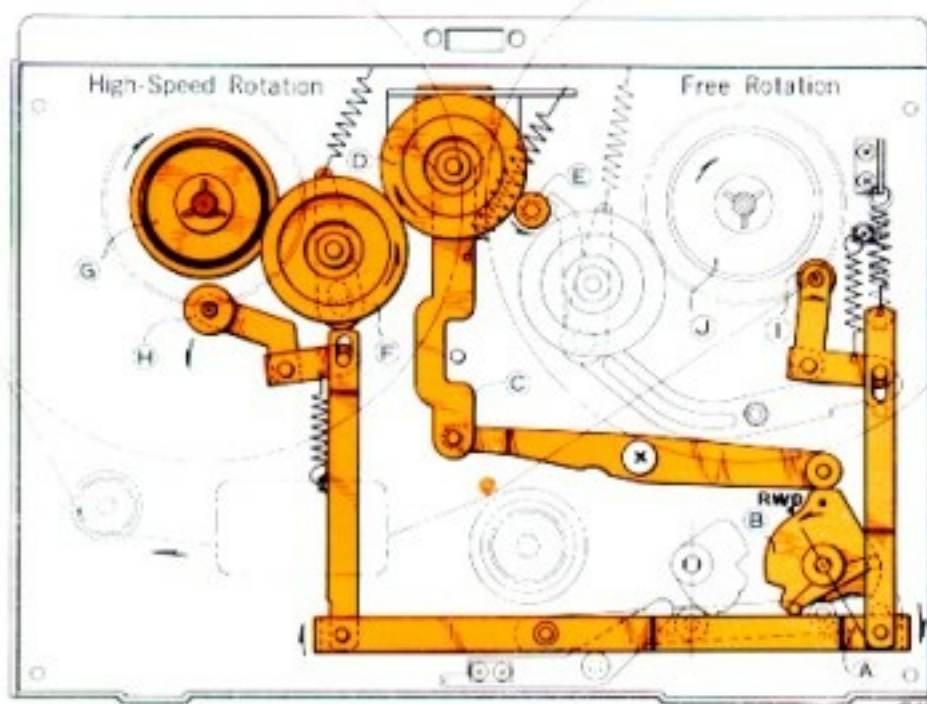


REWIND MECHANISM

Turn the *FAST FWD-REWIND knob* (A) to "REWIND" position, and the *cam* (B) under the knob pushes the *Lever* (C) up. The *Idler* (H) moves into the space between the upper part of the rotating *Motor drive bushing* (E) and the *Intermediate Pulley* (F) to transmit the high-speed rotation of the motor through the intermediate pulley to the *Supply Reel Spindle* (G). At the same time, *Brake Rollers* (I) and (J) come off the reel spindle to free the *take-up reel spindle* (D), thereby rewinding the tape into the supply reel at a fast speed.

(See figure 4)

Fig. 4

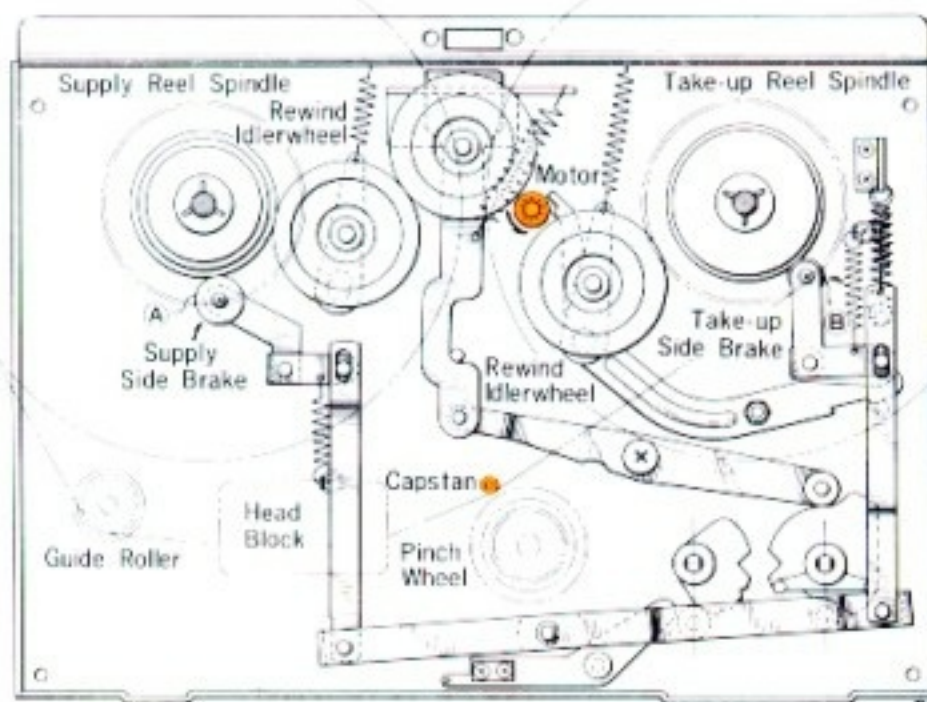

STOP CONTROL

Push the stop lever to "STOP" position, *Brake Rollers* (A) and (B) depress reel spindles to stop rotation of the reel spindles.

As the brake rubber depresses the plastic rollers under the reel spindles, no friction works on the tape itself.

Fig. 5

Modes of Operation	Pinch Wheel	Take-up Idler Wheel	Rewind Idler Wheel	Take-up side Brake	Supply side Brake
(a) STOP	×	×	×	○	○
(b) FAST-FORWARD	×	○	×	×	×
(c) REWIND	×	×	○	×	○
(d) RECORDING PLAYBACK	○	○	×	×	×

NOTES: ×-marks indicates "open" and
○-marks "engaged"

RECORD/PLAYBACK CHANGING MECHANISM

By turning the RECORD/PLAYBACK KNOB ⑧ to the recording position, the LEVER ⑩ pushes the RECORDING LEVER ⑥ and ⑦, as illustrated in dotted line, then the RECORD/PLAYBACK CHANGING SWITCH (SW1) turns to recording position.

If the LEVER ⑩ does not push the LEVER ⑦ properly, the SW1 does not operate properly so may occur the abnormal oscillation and also can't record.

Then must adjust the LEVER ⑩ to proper position by loosening the SCREW ④.

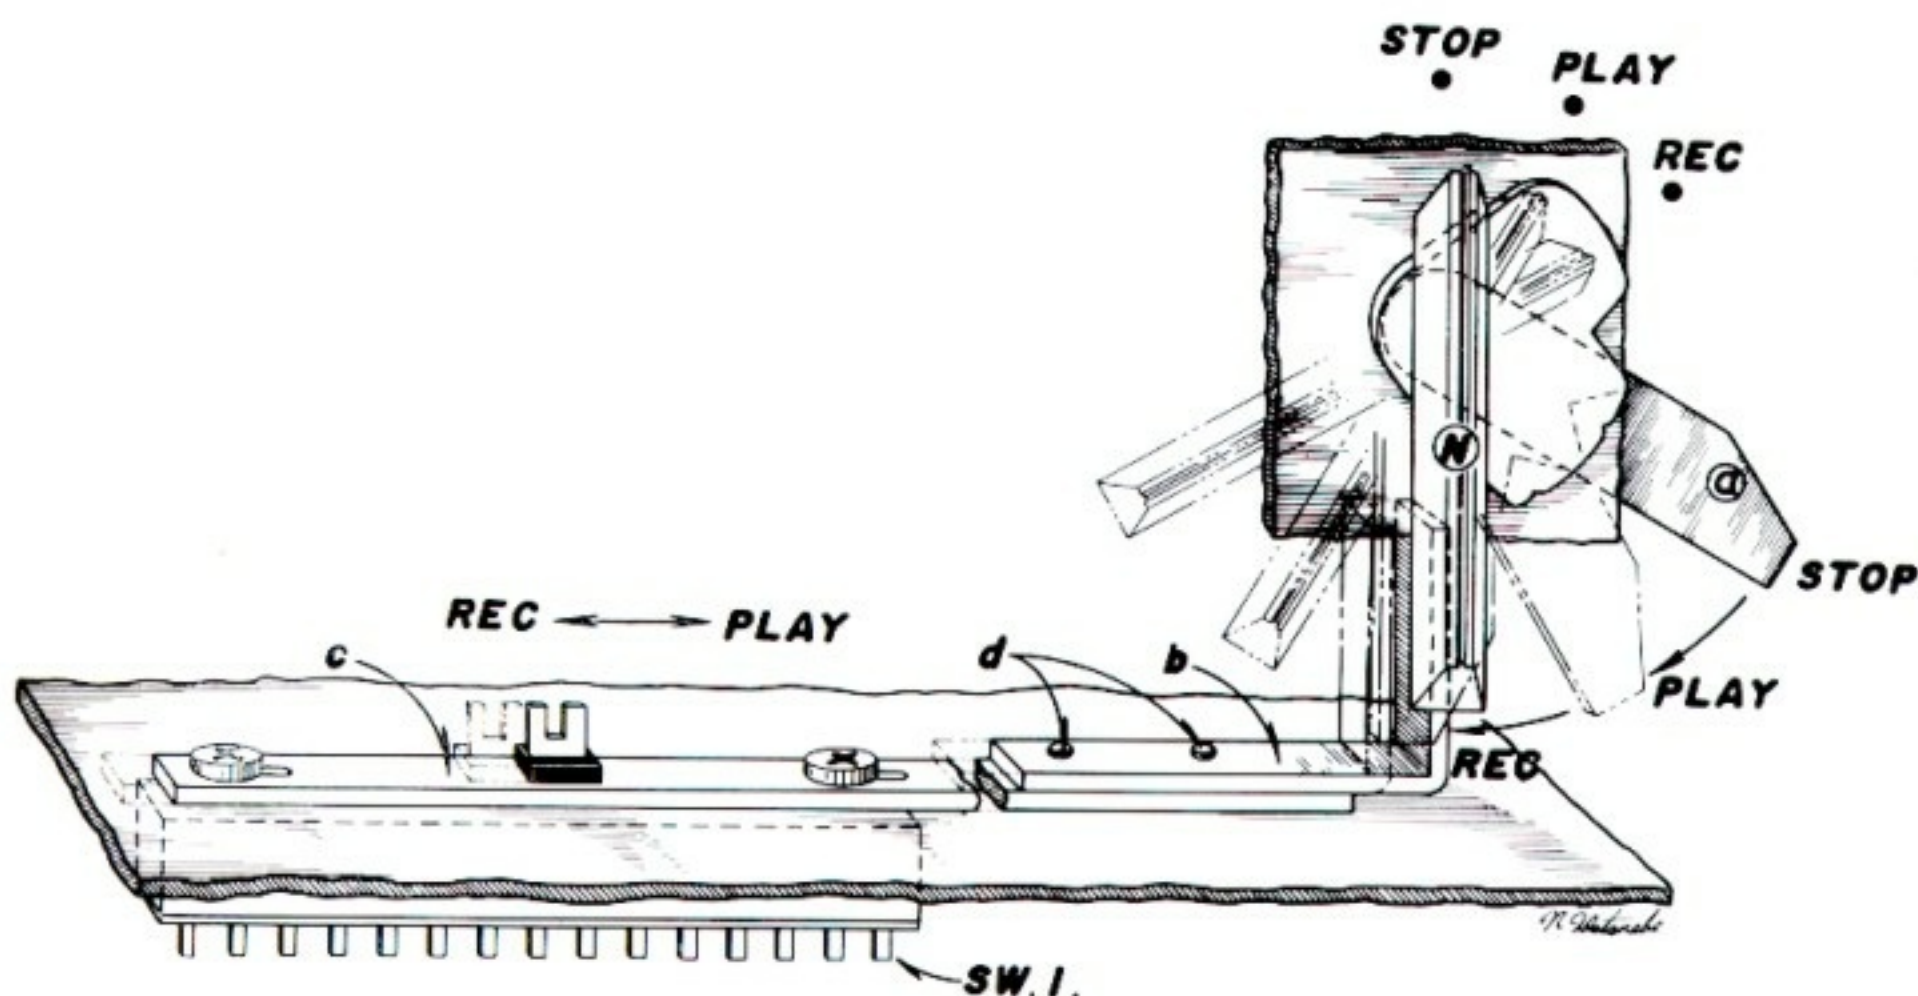


Fig. 6

VI. MECHANISM ADJUSTMENT

1. ADJUSTMENT OF PINCH WHEEL

It is important that the pinch wheel shaft is kept in complete alignment with the capstan shaft. A proper pinch wheel pressure is between 1,000 and 1,150 grams when the unit is operated at the tape speed of 7-1/2 ips. Any deviation from this specification will result in wow and flutter. Check pinch wheel pressure by a spring scale, and if necessary, adjust the pinch wheel load spring.

2. ADJUSTMENT OF TAKE-UP IDLER WHEEL

The take-up idler wheel must be kept in complete alignment with the take-up reel shaft. When the unit is set in fast forward condition, the idler wheel will contact to the upper knurled wheel of the take-up reel shaft assembly, and it will contact to the lower knurled wheel during record or play mode. Adjust idler wheel load spring so that the idler wheel pressure is kept between 50 and 80 grams. The idler wheel rapidly wears if the pressure is excessive. The slip-page occurs if the pressure is smaller than the specification.

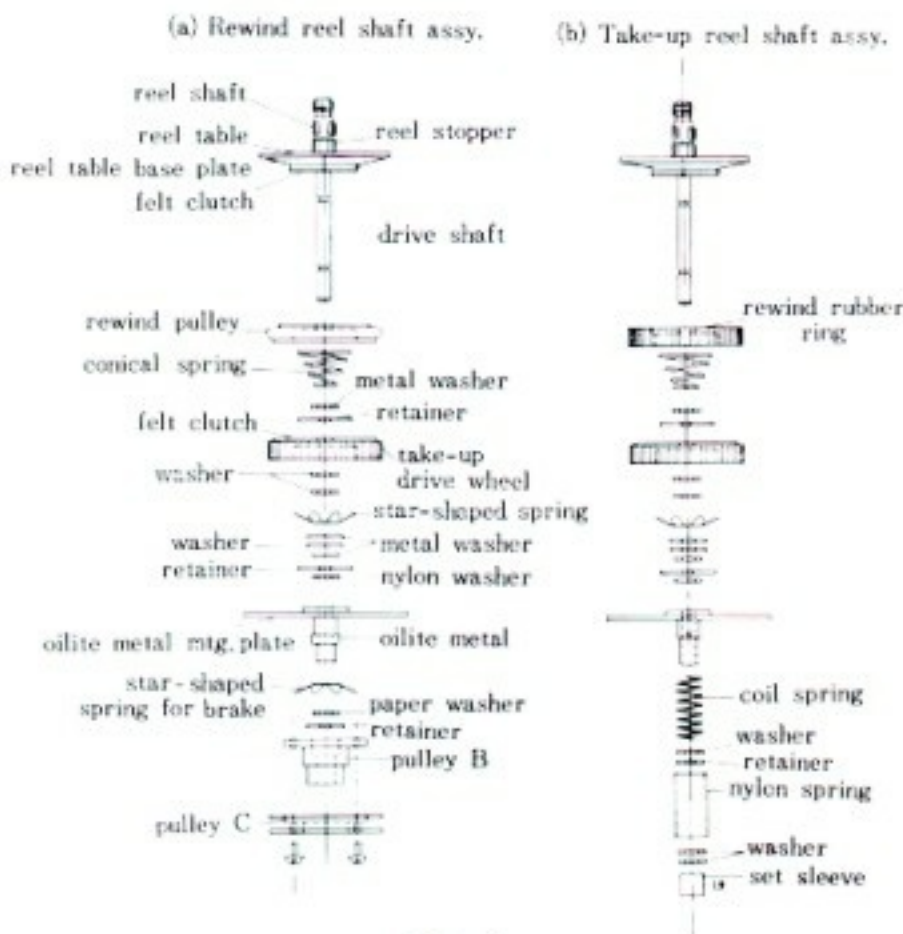


Fig. 1

3. ADJUSTMENT OF REWIND IDLER WHEEL

The rewind idler wheel must be kept in complete alignment with the rewind reel shaft. The amount of pressure to the knurled motor bushing should be maintained about 50 grams during rewind operation. Adjust both the idler load spring and rewind roller.

4. ADJUSTMENT OF INTERMEDIATE WHEEL

The intermediate wheel is located between the rewind idler wheel and the rubber ring which is used on the upper part of the supply reel shaft assembly. When the unit is set in rewind mode, it will contact to these parts simultaneously delivering torque of motor. An adequate pressure is 50 grams. Adjust the load spring of the intermediate wheel if the pressure is not sufficient.

5. ADJUSTMENT OF TAKE-UP REEL SHAFT ASSEMBLY


A felt clutch material is attached to the bottom side of the reel table base plate so that recording tape will not be stretched during fast forwarding operation due to excessive tension. To check the amount of friction of this part, place a 5-inch reel with recording tape wound by 60 m/m in diameter, and gently pull the end of tape upward using a spring scale. Adjust the conical spring so that the amount of tension at this part will be kept between 400 to 500 grams. Another felt clutch material is attached to the take-up drive wheel. It is to provide proper slipping operation during record or play mode. The procedure for checking friction of this part is same as the foregoing, and between 150 and 200 grams of friction will provide the best result. Adjust the star-shaped spring just under the take-up drive wheel. When the unit is set in rewind mode, the amount of friction of this part will greatly be reduced and will become 15 to 20 grams. Check to see whether this is satisfactory if not, readjust the star-shaped spring for Brake, and spring retainer washed accordingly. (See figure 1 (b) at left)

6. ADJUSTMENT OF SUPPLY REEL SHAFT ASSEMBLY

A felt clutch material is used between the lower side of the reel table base plate and the rewind rubber ring to protect recording tape from an excessive tension while rewinding operation. To check the amount of friction of this part, place onto the supply reel table a 5-inch reel with recording tape wound by 60 m/m in diameter and gently pull the end of tape upward by a spring scale. Adjust the conical spring so that the amount of tension is kept between 400 and 500 grams. Another felt clutch is attached to the rewind drive wheel to provide proper slipping operation during record or play mode. The procedure for checking friction of this part is same as the foregoing, and between 80 and 120 grams of friction will give the best result. When the unit is set in fast forward mode, the amount of friction will greatly be reduced and will become 15 to 20 grams.

Check to see whether this is proper, if not, readjust coil spring and spring retainer washer. (See figure 1 (a) at left)

7. ADJUSTMENT OF HEAD

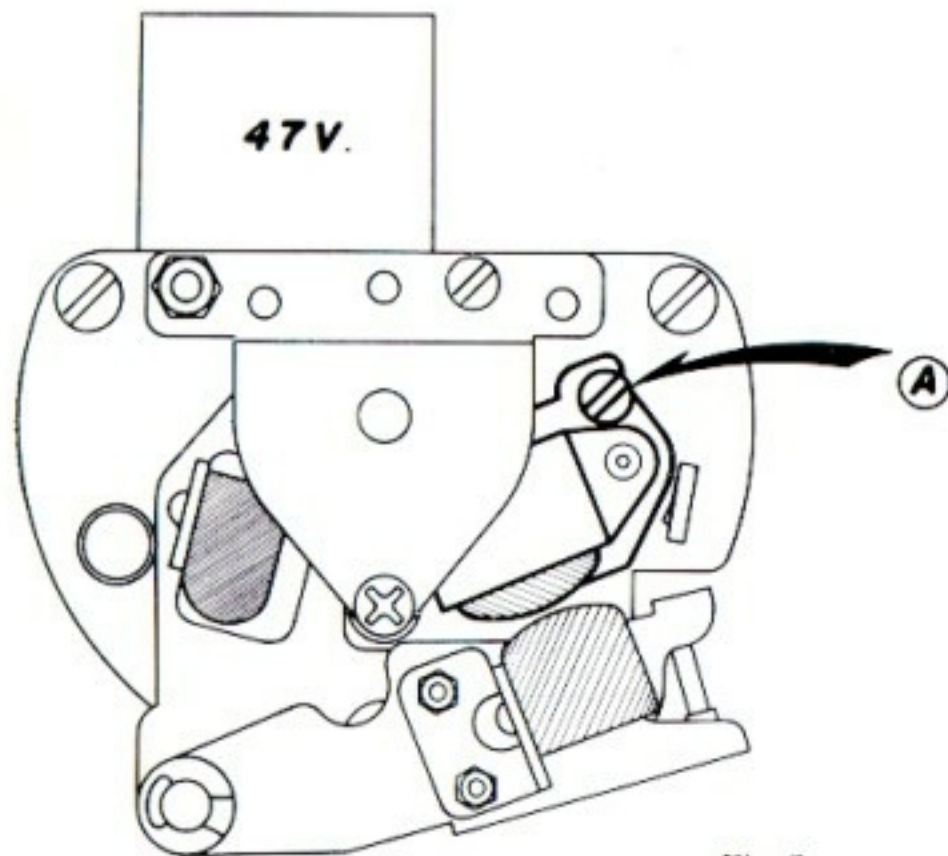

- a) Playback 8,000 cps recorded tape and set the azimuth alignment of the Recording/Playback Head by turning the screw ① until the voltage of the Line Output or the VU meter reads at a maximum.
- b) Adjustment of Head Level.

Fig. 2


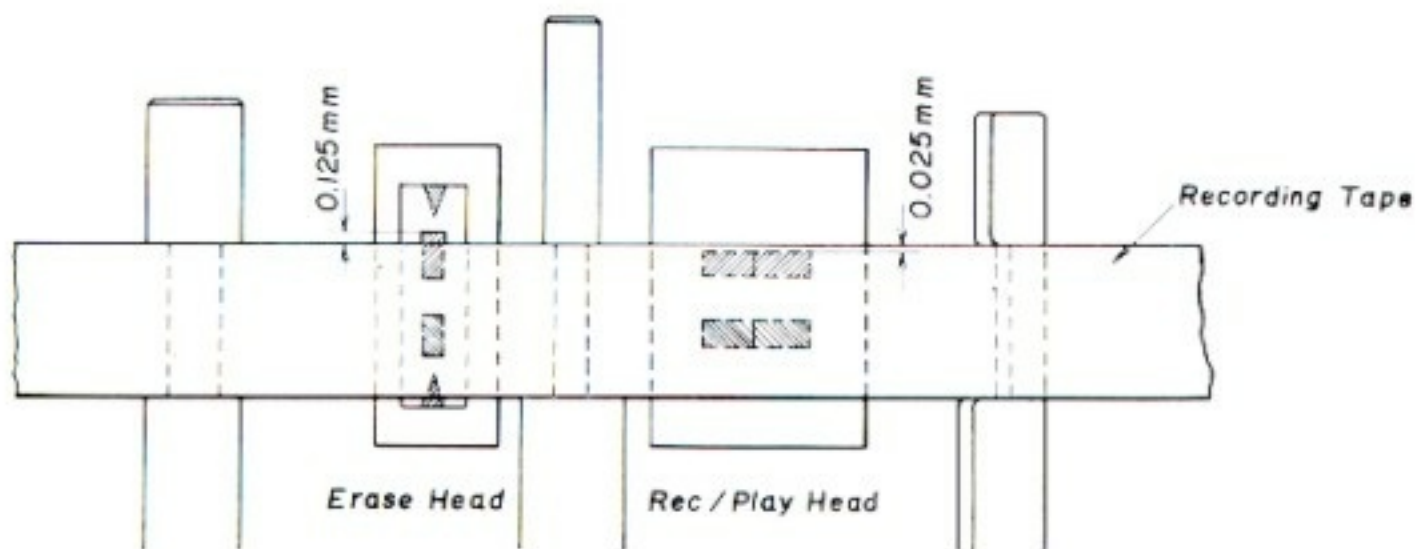


Fig. 3

- ① Position the Erase Head about 0.125 mm above the upper edge of the tape by adjusting the height of the cam provided in the lower part of the head assembly.
- ② Adjust the position of the Recording/Playback Head in a manner illustrated in figure 3 by adjusting the level control nut ① at the lower part of the head assembly.


VII. AMPLIFIER ADJUSTMENT

1. ADJUSTMENT OF RECORDING BIAS FREQUENCY

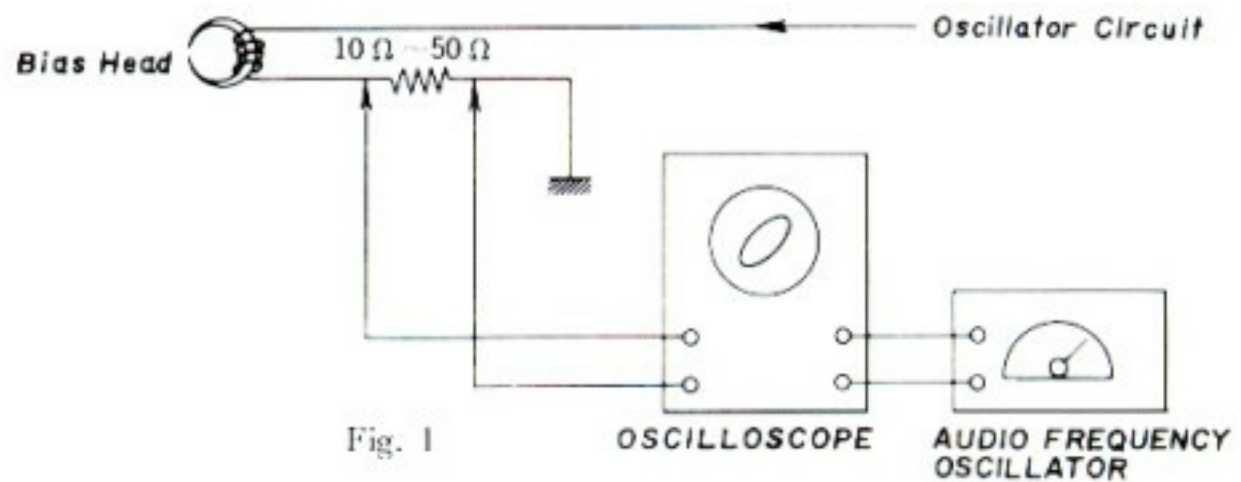

- Connect the resistor ($10\ \Omega$ or $50\ \Omega$) in series with the bias head, and connect the signal from the resistor to the vertical input of the oscilloscope. The output of the audio frequency oscillator should be connected to the horizontal input of the oscilloscope. Proper Bias frequency of the recorder X-150D is obtained when the oscilloscope displays a circular or linear waveform with the frequency of the audio frequency oscillator in the neighbourhood of 60 kc/s. The frequency of the bias oscillator circuit can be adjusted by converting the value of the condenser (C 18. 10,000 PF).

2. ADJUSTMENT OF RECORDING BIAS VOLTAGE

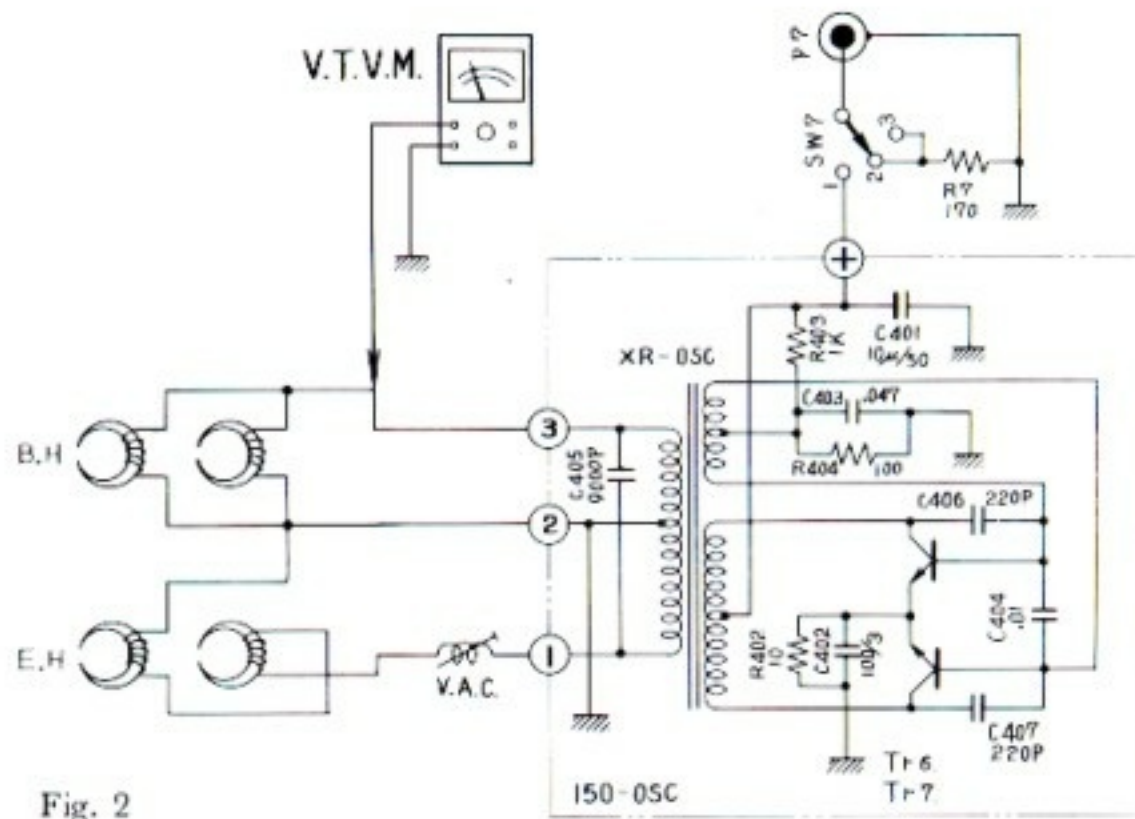

- Connect the V.T.V.M. to the bias head and fix the recording bias voltage by adjusting the V.A.C in the bias oscillator circuit (located near the head assembly) until its readings becomes equal to the bias voltage stamped backside the head assembly. Normal bias voltage is between 60 V and 70 V, while acceptable terminal voltage of the erase head is between 12 V and 18 V.

3. ADJUSTMENT OF PLAYBACK GAIN

- a) Playback 0 VU tape recorded with 1,000c/s signal information and adjust the semi-fixed resistor VR201 (20 K Ω B) of the preamplifier card so that the pointer of the VU meter registers on 0 VU point (intermediate between red and black).
- b) When performing the above adjustments, make sure that the equalization switch has been set in coincidence with the speed of the tape.

4. ADJUSTMENT OF RECORDING LEVEL

- a) The recording level should be adjusted after the playback gain has been adjusted in the manner described.
- b) Set a standard tape (SCOTCH-111) on the recorder X-150D and put it in a recording mode of operation.
- c) Connect the signal of 1,000c/s from the audio oscillator to the line input of the recorder X-150D, and adjust the volume control so that the pointer of the VU meter registers on 0 VU (intermediate between red and black).
- d) Now record the tape and check on playback whether the pointer of the VU meter comes on the 0 VU point.
- e) If the pointer of the VU meter fails to register with 0 VU, repeat the recording and playback by adjusting the semi-fixed register VR 161 (2 K Ω B) of the recording preamplifier until the 0 VU reading is obtained both on recording and playback.

VIII. MAINTENANCE PROCEDURES

1. LUBRICATION INSTRUCTION

For maximum service life and optimum performance, lubricate the parts identified below after each 500 hours of operation. Use only light machine oil of good quality.

Motor

Flywheel Assembly

Rewind Idler Wheel and Wind Take-Up Idler

1 drop

Intermediate Idler


1 drop

Pinch Wheel

1 drop

Also apply a liberal film of light machine grease to each roller surface of all levers and cams.

CAUTION : DO NOT OVER-LUBRICATE, AND WIPE OFF EXCESS OIL BY A COTTON SWAB SOAKED IN ALCOHOL. OTHERWISE, THE OVER-FLOWED LUBRICANT MAY BE SCATTERED DURING OPERATION. THE RUBBER COMPONENT PARTS WILL BE DETERIORATED.

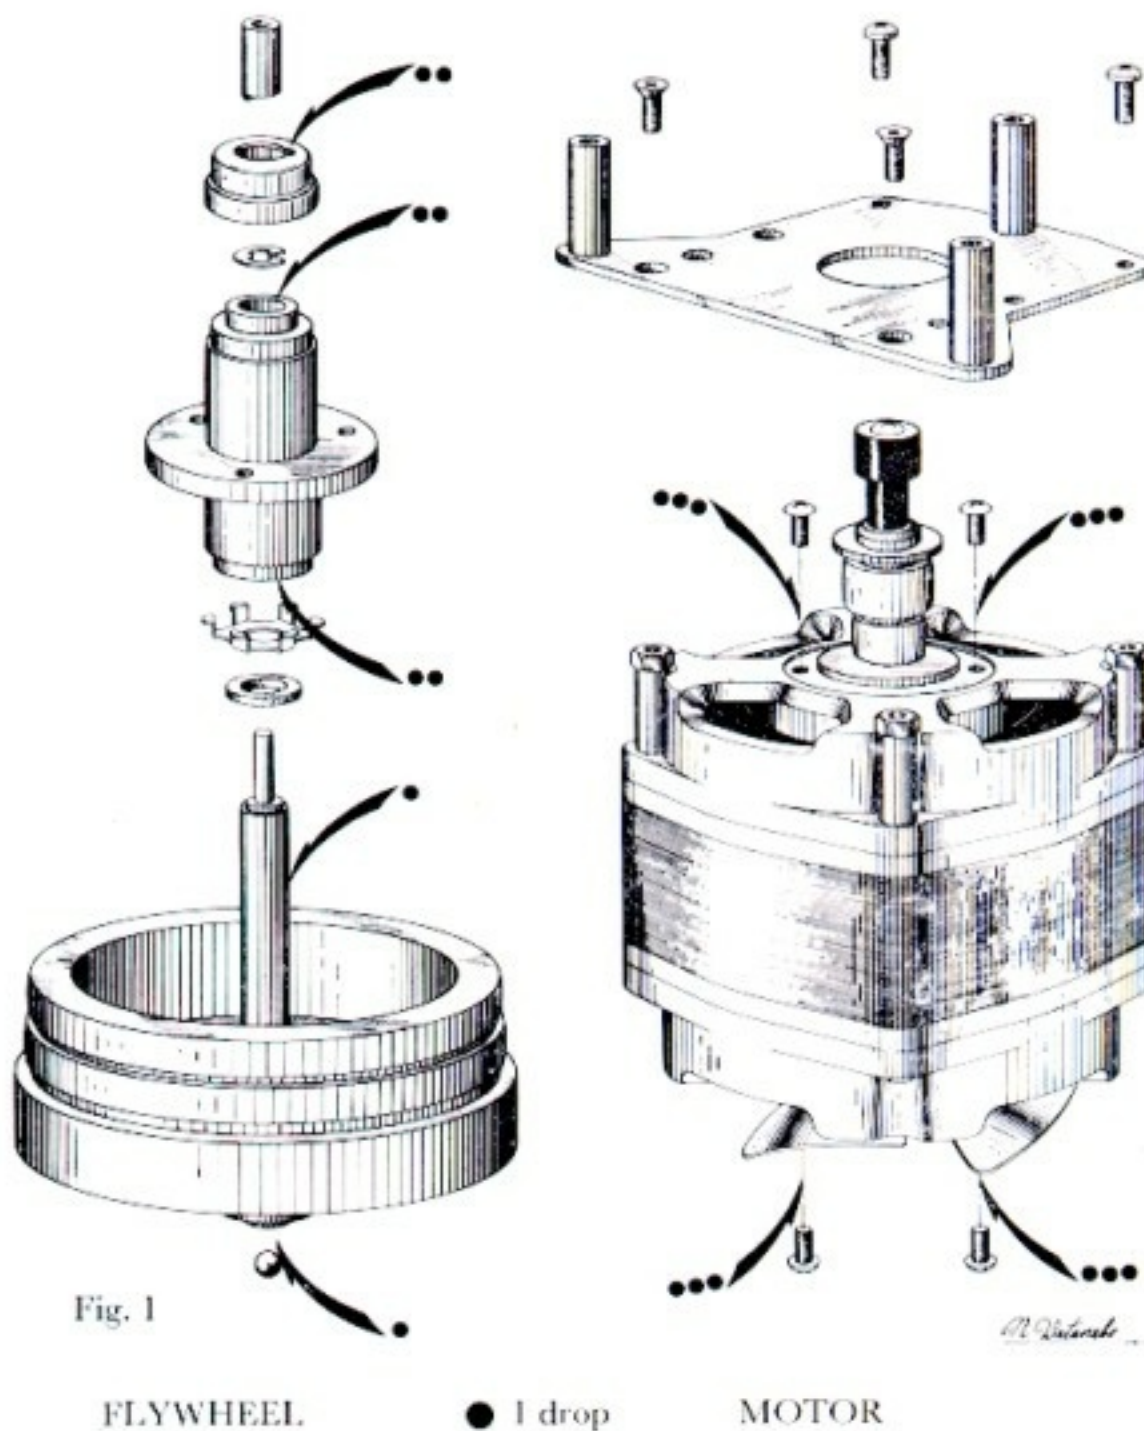

2. CLEANING TAPE HEADS AND OTHER PARTS

Wipe surface of tape heads, guide roller bearing, capstan bushing and pinch wheel periodically with a soft cloth soaked in alcohol or carbon-tet.

IX. REPLACEMENT PARTS TABLE

Parts No.	Nomenclature	Parts No.	Nomenclature	Parts No.	Nomenclature
C1-001	* Deck Panel	C2-003	Tape Counter, Complete	C2-009d	Lever, Pinch Wheel
002	* Knob, Track Selector Control	003a	Pulley, Counter	009e	Shaft C, Pinch Wheel
002a	Screw, Retaining Track Selector Control Knob	003b	Belt, Counter	009f	Spring, Pinch Wheel
003	* Head Cover (Main)	004	* Supply Reel Assembly, Complete	009g	Shaft A, Cam Roller
004	* Head Cover (Sub)	004a	Retainer, Reel	009h	Cam Roller, B
005	Base, Head Cover	004b	* Reel Plate, Assembly	010a	Lever, Take-up Brake Roller
006a	Capstan Rest	004c	Rubber Ring	010b	Rubber (Small), Brake
006b	Capstan Holder	004d	Rewind Pulley	010c	Screw, Brake Roller
007a	Top Plate, Tape Guide	004e	Spring G (Left)	010d	Shaft, Brake Lever
007b	Table, Tape Guide	004f	Washer	011a	Lever, Supply Brake Roller
007c	Bearing, Tape Guide	004g	Thrust Washer Pin, Reel	011b	Rubber (Large), Brake
007d	Bottom Plate, Tape Guide	004h	Take-up Roller, C	011c	Screw, Brake Roller
008	Tape Cleaner, Complete	004i	Holder, Reel (Star Type Spring)	011d	Shaft, Brake Lever
008a	Felt, Tape Cleaner	004j	Nylon Washer	012a	6 P Slide Switch ESS-22C-NB (Automatic Switch)
009	Prop A, Head Cover	004k	Washer	012b	Plate, Automatic Switch
010	Prop C, Head Cover	004l	Washer	013a	Speed Change Switch
011	Escutcheon, Recording Lamp	004m	Thrust Washer Pin, Reel	013b	Table, Speed Change Switch
DECK FRAME		004n	Washer	013c	* Spring, Lever FB
C2-001	* Deck Frame	004o	Washer	014	Idler Wheel, A
002	Head Assembly, Complete	004p	* Metal Fitting, Reel	015	Internal Wheel
002a	Erase Head	004q	Holder, Reel (Star Type Spring)	016a	Lever, A (with Lever E)
002b	Record/Playback Head	004r	Washer	016b	Shaft, Lever A
002c	Bias Head	004s	Washer Pin	016c	Spring, D
002d	Spring, D	004t	Pulley B2, Reel	017a	Lever, B (with Lever D)
002e	Tape Guide (No. 17)	004u	Screw, without Head 4 x 7	017b	Cam Roller, A
002f	Tape Guide (N-3)	004v	Pulley C, Reel	017c	Cam Roller, B
002g	Tape Guide (N-2)	004w	Screw Flat 3 x 6	017d	Spring, B
002h	Table, Head	004x	Screw	018a	Lever, C3
002i	4 T Cam	005	* Take-up Reel Assembly, Complete	018b	Spring, D
002j	Gear B, Head	005a	Take-up Roller, A	019a	Lever, G (with Lever H-D)
002k	Spring, Field Table	005b	Spring G (Right)	019b	Metal, Lever G
002l	Holder, Spring	005c	Take-up Roller, D	019c	Shaft B, Idler
002m	Nut, Head Lever	005d	Spring F3	019d	Spring, Lever H-D
002n	Up-Down Table, Field	005e	Washer	020a	Lever, K
002o	Table, Field	005f	Washer	020b	Screw
002p	Spring, Field Table	005g	Set Sleeve	020c	Torsion Spring, D
002q	Micro Angle Table	005h	Screw, without Head 3 x 3.2	020d	Bush
002r	4 T Shaft	005i	Nylon Tube	021a	Lever, FA
002s	Upper Plate, Head	006a	AS Lever, Complete	021b	Cam Roller, A
002t	Screw, Angle Adjustment	006b	Spring, AS Lever	022	Lever, F (for Motor)
002u	Plate, retaining Erase Head	006c	Plate, AS Lever (with Prop)	023	Lever, A2
002v	Plate, retaining Record/Playback Head	007a	Instant Stop Lever, A	024	Field Lever, A
002w	Side Plate, Bias Head	007b	Spring, Instant Stop Lever	025	Field Lever, B
002x	Rotary Switch	007c	Stopper, Instant Stop Lever	026	Field Lever, D
002y	Gear A, Head	007d	Holder B, Instant Stop Lever		
002z	4 T Switch Table	007e	Screw, Retaining Instant Stop Lever		
		008a	Recording Safety Button		
		008b	Cam Stopper		
		008c	Fiber, Cam Stopper		
		008d	Insulator Plate, Cam Stopper		
		009a	Pinch Wheel		
		009b	Metal Cap, Pinch Wheel		
		009c	Screw, Pinch Wheel		

Parts No.	Nomenclature
C2-027	Field Lever, E
028	* Prop, Panel
029	Holder B, Spring
030	Pin B, Spring
031	Stopper C, Lever G
032	Hum Bucking Coil
033	Cycle Change Switch
034	Micro Switch V-1A
035	3 P Lug Plate
036	4 P Jack
038a	Lever, Belt Change
038b	Stopper, Belt Change Lever
038c	Spring, Belt Change Lever
038d	Spring B, Belt Change Lever
040	* Table, Oscillator Card Block
041	* Voltage Adjustment Coil
042	* Tubular Type Electrolytic Condenser
MOTOR BLOCK	
C3-001	Motor, Complete
001a	+ Screw Semi-Cubic 3 × 15
001b	Stepped Pulley
001c	Motor Pulley
001d	Holder L, Motor
001f	Motor Fan
001g	Screw, without Head
001h	Prop A, Motor
001i	Prop B, Motor
001j	* MP Condenser 2 μ + 0.8 μ 250 VAC
001k	Holder, MP Condenser
001l	+ Screw Flat Mould 4 × 50
001m	External Shield Plate, Motor
002a	* MP Condenser 1 μ 220 VAC
002b	5 P Lug Plate
003	Drive Belt
FLYWHEEL	
C4-001	Flywheel, Complete
001a	Capstan
001b	Main Metal Cap, B
001c	Washer Pin
001d	Main Metal Case, B
001e	Spring, Main Metal

Parts No.	Nomenclature
C4-001f	Nylon Washer
001g	Main Shaft C
001i	4mm Ball Bearing
001j	Nylon Plate
001k	Plate B, Flywheel
001l	Washer
001m	Spring Washer
001n	Washer
001o	5mm Wing Nut
001p	Screw, Flywheel Adjustment
001q	5mm Nut
001r	Prop B, Flywheel
001s	Prop A, Flywheel
SWITCH BLOCK	
C5-001	Switch Block, Complete
001a	* Knob, Record/Play & Rewind Forward Fast
001b	* Screw
001c	Cam, A 2
001d	Cam, B
001e	Cam Roller, A
001f	Switch Table, A
001g	Spring, E
001h	Lever, I
001i	Screw
001j	4mm Nut
001k	Rotary Switch S-133-B
001l	Fast/Forward Rewind Shaft
001m	Plate, Cam
001n	Spring, K
001o	Cam, C
001p	+ Screw Flat Mould 4 × 6
001q	Shield, Mechanism Switch
001r	Switch Table, B
001s	Washer
001t	Cam
001u	Washer
001v	Washer Pin
002a	Wired Resistor 5W 170 Ω
002b	5 P Lug Plate
CASE BLOCK	
C6-001	* Case
002a	Table, Rubber Foot
002b	Rubber Foot
002c	+ Semi-Cubic 3 × 6
003	* Ventilator, A
004	* Ventilator, G
005a	* Speaker Chassis, Left
005b	* Speaker Chassis, Right
006	Speed Nut


Parts No.	Nomenclature
AMPLIFIER	
C7-001	Amp. Chassis
001a	Lug Plate, 2 L 2
001b	Lug Plate, 1 L 1
001c	Lug Plate, 1 L
002	* Power Transformer (T-1)
003a	Holder, Jack
003b	Name Plate, Jack
004a	DIN Jack (J5)
004b	2 Pole E.I. Jack (J3)
004c	2 Pole E Jack (J2)
004d	2 Pole E.I. Jack (J1) (Mic.)
004e	3 Pole E Jack (J4) (Headphone)
005	Toggle Switch ST-110A (Power Switch) (SW-1)
006a	Plate D, Jack
006b	Plate C, Jack
007	Variable Resistor 50 K Ω (A) (VR 1)
008	Rotary Switch F-243 (SW-9)
008a	Shield Holder
009a	Amplifier Lever, A
009b	Amplifier Lever, B
009c	Spring B
010a	Lamp Socket (Swan Type)
010b	Pilot Lamp
011	* VU Meter
012a	Holder D, Multi Jack
012b	10 P Multi Jack
012c	Prop, Multi Jack
013a	Resistor 1/4 P 680 K Ω (R1)
013b	Resistor 1/4 P 220 K Ω (R2)
013c	Resistor 1/4 P 68 K Ω (R3)
013d	Wired Resistor 2W 82 Ω (R5)
013e	Resistor 1WL 910 Ω (R4)
013f	Resistor 1/4 P 4.7 K Ω (R8)
013g	Resistor 1/4 P 15 K Ω (R9)
014a	Tubular Type Electrolytic Condenser 500 μ F 50 WV (C1)
014b	Tubular Type Electrolytic Condenser 1000 μ F 25 WV (C2)
015	Holder, Card
016	Shield
017	Silicon Diode SW-05-01

Parts No.	Nomenclature
C7-018	Angle, Voltage Change
019	6 P Slide Switch ESS-22 A-NB (SW 3)
020	Name Plate, Cycle Change
021	Socket, Voltage Change
022	Hexangular Prop, Selector
023	Plug S, Voltage Change
024	Name Plate, AC Change
025	Closed Nut
026	2 P Jack (J6)
027a	Fuse Post
027b	Fuse
028	Cord Support
029	Rubber Bush, AC Cord
030	AC Cord (10 Feet)
031	Chip Jack (J7)
032	4 P Connector Socket (J9)
033	* Knob A (Rec. Level)
034	Knob B (Equalizer)
035	4 P Connector Socket
CARD BLOCK	
C8 001	* Switch Block Card, Complete (CD 511)
002	* Printed Circuit Plate, Switch Block
003	* Slide Switch SL-1021 F
004a	* Inductance 3 mH (J)
004b	* Inductance 47 mH (J)
005	* Diode 1N34 A (D 101)
006	* Transistor 2 SC 458 (B) (Tr 5)
007	* 4 P Plug
008a	* Resistor $\frac{1}{4}$ P 120 K Ω K (R 109)
008b	* Resistor $\frac{1}{4}$ P 68 K Ω K (R 101)
008c	* Resistor $\frac{1}{4}$ P 22 K Ω K ($\frac{R 102, 103, 105, 106, 107, 108, 109, 110, 111, 112, 113, 114, 115, 116, 117, 118, 119, 120, 121, 122, 123, 124, 125, 126, 127, 128, 129, 130, 131, 132, 133, 134, 135, 136, 137, 138, 139, 140, 141, 142, 143, 144, 145, 146, 147, 148, 149, 150, 151, 152, 153, 154, 155, 156, 157, 158, 159, 160, 161, 162, 163, 164, 165, 166, 167, 168, 169, 170, 171, 172, 173, 174, 175, 176, 177, 178, 179, 180, 181, 182, 183, 184, 185, 186, 187, 188, 189, 190, 191, 192, 193, 194, 195, 196, 197, 198, 199, 200, 201, 202, 203, 204, 205, 206, 207, 208, 209, 210, 211, 212, 213, 214, 215, 216, 217, 218, 219, 220, 221, 222, 223, 224, 225, 226, 227, 228, 229, 230, 231, 232, 233, 234, 235, 236, 237, 238, 239, 240, 241, 242, 243, 244, 245, 246, 247, 248, 249, 250, 251, 252, 253, 254, 255, 256, 257, 258, 259, 260, 261, 262, 263, 264, 265, 266, 267, 268, 269, 270, 271, 272, 273, 274, 275, 276, 277, 278, 279, 280, 281, 282, 283, 284, 285, 286, 287, 288, 289, 290, 291, 292, 293, 294, 295, 296, 297, 298, 299, 300, 301, 302, 303, 304, 305, 306, 307, 308, 309, 310, 311, 312, 313, 314, 315, 316, 317, 318, 319, 320, 321, 322, 323, 324, 325, 326, 327, 328, 329, 330, 331, 332, 333, 334, 335, 336, 337, 338, 339, 340, 341, 342, 343, 344, 345, 346, 347, 348, 349, 350, 351, 352, 353, 354, 355, 356, 357, 358, 359, 360, 361, 362, 363, 364, 365, 366, 367, 368, 369, 370, 371, 372, 373, 374, 375, 376, 377, 378, 379, 380, 381, 382, 383, 384, 385, 386, 387, 388, 389, 390, 391, 392, 393, 394, 395, 396, 397, 398, 399, 400, 401, 402, 403, 404, 405, 406, 407, 408, 409, 410, 411, 412, 413, 414, 415, 416, 417, 418, 419, 420, 421, 422, 423, 424, 425, 426, 427, 428, 429, 430, 431, 432, 433, 434, 435, 436, 437, 438, 439, 440, 441, 442, 443, 444, 445, 446, 447, 448, 449, 450, 451, 452, 453, 454, 455, 456, 457, 458, 459, 460, 461, 462, 463, 464, 465, 466, 467, 468, 469, 470, 471, 472, 473, 474, 475, 476, 477, 478, 479, 480, 481, 482, 483, 484, 485, 486, 487, 488, 489, 490, 491, 492, 493, 494, 495, 496, 497, 498, 499, 500, 501, 502, 503, 504, 505, 506, 507, 508, 509, 510, 511, 512, 513, 514, 515, 516, 517, 518, 519, 520, 521, 522, 523, 524, 525, 526, 527, 528, 529, 530, 531, 532, 533, 534, 535, 536, 537, 538, 539, 540, 541, 542, 543, 544, 545, 546, 547, 548, 549, 550, 551, 552, 553, 554, 555, 556, 557, 558, 559, 560, 561, 562, 563, 564, 565, 566, 567, 568, 569, 570, 571, 572, 573, 574, 575, 576, 577, 578, 579, 580, 581, 582, 583, 584, 585, 586, 587, 588, 589, 590, 591, 592, 593, 594, 595, 596, 597, 598, 599, 600, 601, 602, 603, 604, 605, 606, 607, 608, 609, 610, 611, 612, 613, 614, 615, 616, 617, 618, 619, 620, 621, 622, 623, 624, 625, 626, 627, 628, 629, 630, 631, 632, 633, 634, 635, 636, 637, 638, 639, 640, 641, 642, 643, 644, 645, 646, 647, 648, 649, 650, 651, 652, 653, 654, 655, 656, 657, 658, 659, 660, 661, 662, 663, 664, 665, 666, 667, 668, 669, 670, 671, 672, 673, 674, 675, 676, 677, 678, 679, 680, 681, 682, 683, 684, 685, 686, 687, 688, 689, 690, 691, 692, 693, 694, 695, 696, 697, 698, 699, 700, 701, 702, 703, 704, 705, 706, 707, 708, 709, 710, 711, 712, 713, 714, 715, 716, 717, 718, 719, 720, 721, 722, 723, 724, 725, 726, 727, 728, 729, 730, 731, 732, 733, 734, 735, 736, 737, 738, 739, 740, 741, 742, 743, 744, 745, 746, 747, 748, 749, 750, 751, 752, 753, 754, 755, 756, 757, 758, 759, 760, 761, 762, 763, 764, 765, 766, 767, 768, 769, 770, 771, 772, 773, 774, 775, 776, 777, 778, 779, 780, 781, 782, 783, 784, 785, 786, 787, 788, 789, 790, 791, 792, 793, 794, 795, 796, 797, 798, 799, 800, 801, 802, 803, 804, 805, 806, 807, 808, 809, 810, 811, 812, 813, 814, 815, 816, 817, 818, 819, 820, 821, 822, 823, 824, 825, 826, 827, 828, 829, 830, 831, 832, 833, 834, 835, 836, 837, 838, 839, 840, 841, 842, 843, 844, 845, 846, 847, 848, 849, 850, 851, 852, 853, 854, 855, 856, 857, 858, 859, 860, 861, 862, 863, 864, 865, 866, 867, 868, 869, 870, 871, 872, 873, 874, 875, 876, 877, 878, 879, 880, 881, 882, 883, 884, 885, 886, 887, 888, 889, 890, 891, 892, 893, 894, 895, 896, 897, 898, 899, 900, 901, 902, 903, 904, 905, 906, 907, 908, 909, 910, 911, 912, 913, 914, 915, 916, 917, 918, 919, 920, 921, 922, 923, 924, 925, 926, 927, 928, 929, 930, 931, 932, 933, 934, 935, 936, 937, 938, 939, 940, 941, 942, 943, 944, 945, 946, 947, 948, 949, 950, 951, 952, 953, 954, 955, 956, 957, 958, 959, 960, 961, 962, 963, 964, 965, 966, 967, 968, 969, 970, 971, 972, 973, 974, 975, 976, 977, 978, 979, 980, 981, 982, 983, 984, 985, 986, 987, 988, 989, 990, 991, 992, 993, 994, 995, 996, 997, 998, 999, 1000$
008d	* Resistor $\frac{1}{4}$ P 15 K Ω K (R 107)
008e	* Resistor $\frac{1}{4}$ P 12 K Ω K (R 111)


Parts No.	Nomenclature
C8 008f	* Resistor $\frac{1}{4}$ P 10 K Ω K ($\frac{R 106, 107, 108, 109, 110, 111, 112, 113, 114, 115, 116, 117, 118, 119, 120, 121, 122, 123, 124, 125, 126, 127, 128, 129, 130, 131, 132, 133, 134, 135, 136, 137, 138, 139, 140, 141, 142, 143, 144, 145, 146, 147, 148, 149, 150, 151, 152, 153, 154, 155, 156, 157, 158, 159, 160, 161, 162, 163, 164, 165, 166, 167, 168, 169, 170, 171, 172, 173, 174, 175, 176, 177, 178, 179, 180, 181, 182, 183, 184, 185, 186, 187, 188, 189, 190, 191, 192, 193, 194, 195, 196, 197, 198, 199, 200, 201, 202, 203, 204, 205, 206, 207, 208, 209, 210, 211, 212, 213, 214, 215, 216, 217, 218, 219, 220, 221, 222, 223, 224, 225, 226, 227, 228, 229, 230, 231, 232, 233, 234, 235, 236, 237, 238, 239, 240, 241, 242, 243, 244, 245, 246, 247, 248, 249, 250, 251, 252, 253, 254, 255, 256, 257, 258, 259, 260, 261, 262, 263, 264, 265, 266, 267, 268, 269, 270, 271, 272, 273, 274, 275, 276, 277, 278, 279, 280, 281, 282, 283, 284, 285, 286, 287, 288, 289, 290, 291, 292, 293, 294, 295, 296, 297, 298, 299, 300, 301, 302, 303, 304, 305, 306, 307, 308, 309, 310, 311, 312, 313, 314, 315, 316, 317, 318, 319, 320, 321, 322, 323, 324, 325, 326, 327, 328, 329, 330, 331, 332, 333, 334, 335, 336, 337, 338, 339, 340, 341, 342, 343, 344, 345, 346, 347, 348, 349, 350, 351, 352, 353, 354, 355, 356, 357, 358, 359, 360, 361, 362, 363, 364, 365, 366, 367, 368, 369, 370, 371, 372, 373, 374, 375, 376, 377, 378, 379, 380, 381, 382, 383, 384, 385, 386, 387, 388, 389, 390, 391, 392, 393, 394, 395, 396, 397, 398, 399, 400, 401, 402, 403, 404, 405, 406, 407, 408, 409, 410, 411, 412, 413, 414, 415, 416, 417, 418, 419, 420, 421, 422, 423, 424, 425, 426, 427, 428, 429, 430, 431, 432, 433, 434, 435, 436, 437, 438, 439, 440, 441, 442, 443, 444, 445, 446, 447, 448, 449, 450, 451, 452, 453, 454, 455, 456, 457, 458, 459, 460, 461, 462, 463, 464, 465, 466, 467, 468, 469, 470, 471, 472, 473, 474, 475, 476, 477, 478, 479, 480, 481, 482, 483, 484, 485, 486, 487, 488, 489, 490, 491, 492, 493, 494, 495, 496, 497, 498, 499, 500, 501, 502, 503, 504, 505, 506, 507, 508, 509, 510, 511, 512, 513, 514, 515, 516, 517, 518, 519, 520, 521, 522, 523, 524, 525, 526, 527, 528, 529, 530, 531, 532, 533, 534, 535, 536, 537, 538, 539, 540, 541, 542, 543, 544, 545, 546, 547, 548, 549, 550, 551, 552, 553, 554, 555, 556, 557, 558, 559, 560, 561, 562, 563, 564, 565, 566, 567, 568, 569, 570, 571, 572, 573, 574, 575, 576, 577, 578, 579, 580, 581, 582, 583, 584, 585, 586, 587, 588, 589, 590, 591, 592, 593, 594, 595, 596, 597, 598, 599, 600, 601, 602, 603, 604, 605, 606, 607, 608, 609, 610, 611, 612, 613, 614, 615, 616, 617, 618, 619, 620, 621, 622, 623, 624, 625, 626, 627, 628, 629, 630, 631, 632, 633, 634, 635, 636, 637, 638, 639, 640, 641, 642, 643, 644, 645, 646, 647, 648, 649, 650, 651, 652, 653, 654, 655, 656, 657, 658, 659, 660, 661, 662, 663, 664, 665, 666, 667, 668, 669, 670, 671, 672, 673, 674, 675, 676, 677, 678, 679, 680, 681, 682, 683, 684, 685, 686, 687, 688, 689, 690, 691, 692, 693, 694, 695, 696, 697, 698, 699, 700, 701, 702, 703, 704, 705, 706, 707, 708, 709, 710, 711, 712, 713, 714, 715, 716, 717, 718, 719, 720, 721, 722, 723, 724, 725, 726, 727, 728, 729, 730, 731, 732, 733, 734, 735, 736, 737, 738, 739, 740, 741, 742, 743, 744, 745, 746, 747, 748, 749, 750, 751, 752, 753, 754, 755, 756, 757, 758, 759, 760, 761, 762, 763, 764, 765, 766, 767, 768, 769, 770, 771, 772, 773, 774, 775, 776, 777, 778, 779, 780, 781, 782, 783, 784, 785, 786, 787, 788, 789, 790, 791, 792, 793, 794, 795, 796, 797, 798, 799, 800, 801, 802, 803, 804, 805, 806, 807, 808, 809, 810, 811, 812, 813, 814, 815, 816, 817, 818, 819, 820, 821, 822, 823, 824, 825, 826, 827, 828, 829, 830, 831, 832, 833, 834, 835, 836, 837, 838, 839, 840, 841, 842, 843, 844, 845, 846, 847, 848, 849, 850, 851, 852, 853, 854, 855, 856, 857, 858, 859, 860, 861, 862, 863, 864, 865, 866, 867, 868, 869, 870, 871, 872, 873, 874, 875, 876, 877, 878, 879, 880, 881, 882, 883, 884, 885, 886, 887, 888, 889, 890, 891, 892, 893, 894, 895, 896, 897, 898, 899, 900, 901, 902, 903, 904, 905, 906, 907, 908, 909, 910, 911, 912, 913, 914, 915, 916, 917, 918, 919, 920, 921, 922, 923, 924, 925, 926, 927, 928, 929, 930, 931, 932, 933, 934, 935, 936, 937, 938, 939, 940, 941, 942, 943, 944, 945, 946, 947, 948, 949, 950, 951, 952, 953, 954, 955, 956, 957, 958, 959, 960, 961, 962, 963, 964, 965, 966, 967, 968, 969, 970, 971, 972, 973, 974, 975, 976, 977, 978, 979, 980, 981, 982, 983, 984, 985, 986, 987, 988, 989, 990, 991, 992, 993, 994, 995, 996, 997, 998, 999, 1000$
008g	* Resistor $\frac{1}{4}$ P 5.6 K Ω K (R 104)
008h	* Resistor $\frac{1}{4}$ P 2.7 K Ω K (R 112)
008i	* Resistor $\frac{1}{4}$ P 1 K Ω K (R 108)
009	* Variable Resistor V-10 K 5 2 K Ω B
010a	* Condenser 3 μ 25 V (C 108)
010b	* Condenser 10 μ 10 V (C 110)
010c	* Condenser 30 μ 3 V (C 111)
010d	* Condenser 330 PF 35 V K (C 102)
010e	* Condenser 0.01 μ 50 V K (C 105)
010f	* Condenser 0.012 μ 50 V J (C 103)
010g	* Condenser 0.015 μ 50 V K (C 106)
010h	* Condenser 0.022 μ 50 V K (C 109)
010i	* Condenser 0.056 μ 50 V K (C 107)
010j	* Condenser 0.15 μ 35 V K (C 101)
010k	* Condenser 120 PF (J) (C 104)
010l	* Condenser 220 PF 125 V (K)
PRE-AMPLIFIER	
C9 001	* Record/Playback Pre-amplifier Card, Complete (CD 512)
002	* Printed Circuit Plate, Record/Playback Preamplifier
003a	* Transistor 2 SC 650 (A) (Tr 1, 2)
003b	* Transistor 2 SC 281 (B) (Tr 3, 4)
004a	* Resistor $\frac{1}{4}$ P 220 Ω K (R 205)
004b	* Resistor $\frac{1}{4}$ P 3.3 K Ω K (R 204)
004c	* Resistor $\frac{1}{4}$ P 4.7 K Ω K ($\frac{R 207, 208, 209, 210, 211, 212, 213, 214, 215, 216, 217, 218, 219, 220, 221, 222, 223, 224, 225, 226, 227, 228, 229, 230, 231, 232, 233, 234, 235, 236, 237, 238, 239, 240, 241, 242, 243, 244, 245, 246, 247, 248, 249, 250, 251, 252, 253, 254, 255, 256, 257, 258, 259, 260, 261, 262, 263, 264, 265, 266, 267, 268, 269, 270, 271, 272, 273, 274, 275, 276, 277, 278, 279, 280, 281, 282, 283, 284, 285, 286, 287, 288, 289, 290, 291, 292, 293, 294, 295, 296, 297, 298, 299, 300, 301, 302, 303, 304, 305, 306, 307, 308, 309, 310, 311, 312, 313, 314, 315, 316, 317, 318, 319, 320, 321, 322, 323, 324, 325, 326, 327, 328, 329, 330, 331, 332, 333, 334, 335, 336, 337, 338, 339, 340, 341, 342, 343, 344, 345, 346, 347, 348, 349, 350, 351, 352, 353, 354, 355, 356, 357, 358, 359, 360, 361, 362, 363, 364, 365, 366, 367, 368, 369, 370, 371, 372, 373, 374, 375, 376, 377, 378, 379, 380, 381, 382, 383, 384, 385, 386, 387, 388, 389, 390, 391, 392, 393, 394, 395, 396, 397, 398, 399, 400, 401, 402, 403, 404, 405, 406, 407, 408, 409, 410, 411, 412, 413, 414, 415, 416, 417, 418, 419, 420, 421, 422, 423, 424, 425, 426, 427, 428, 429, 430, 431, 432, 433, 434, 435, 436, 437, 438, 439, 440, 441, 442, 443, 444, 445, 446, 447, 448, 449, 450, 451, 452, 453$

X. EXPLODED VIEW OF COMPONENT PARTS


CASE

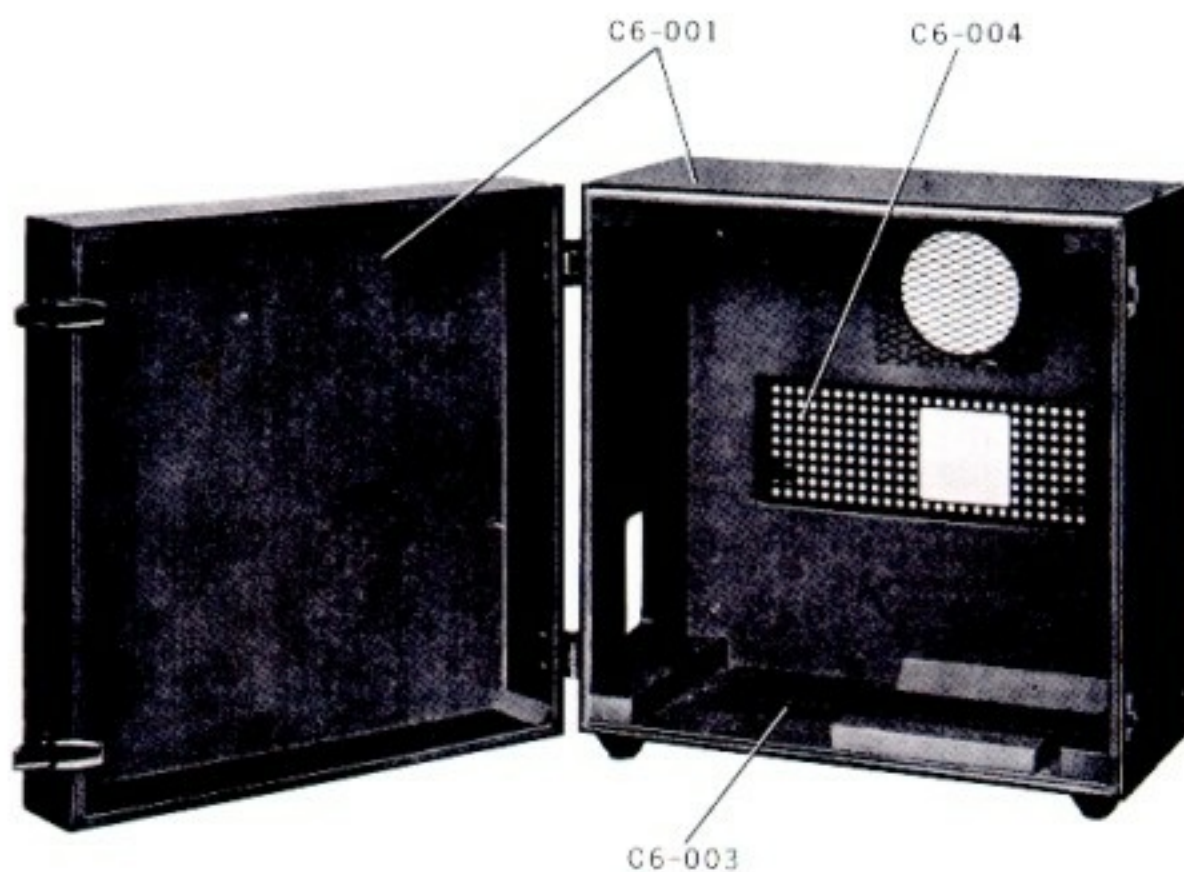


FRONT PANEL

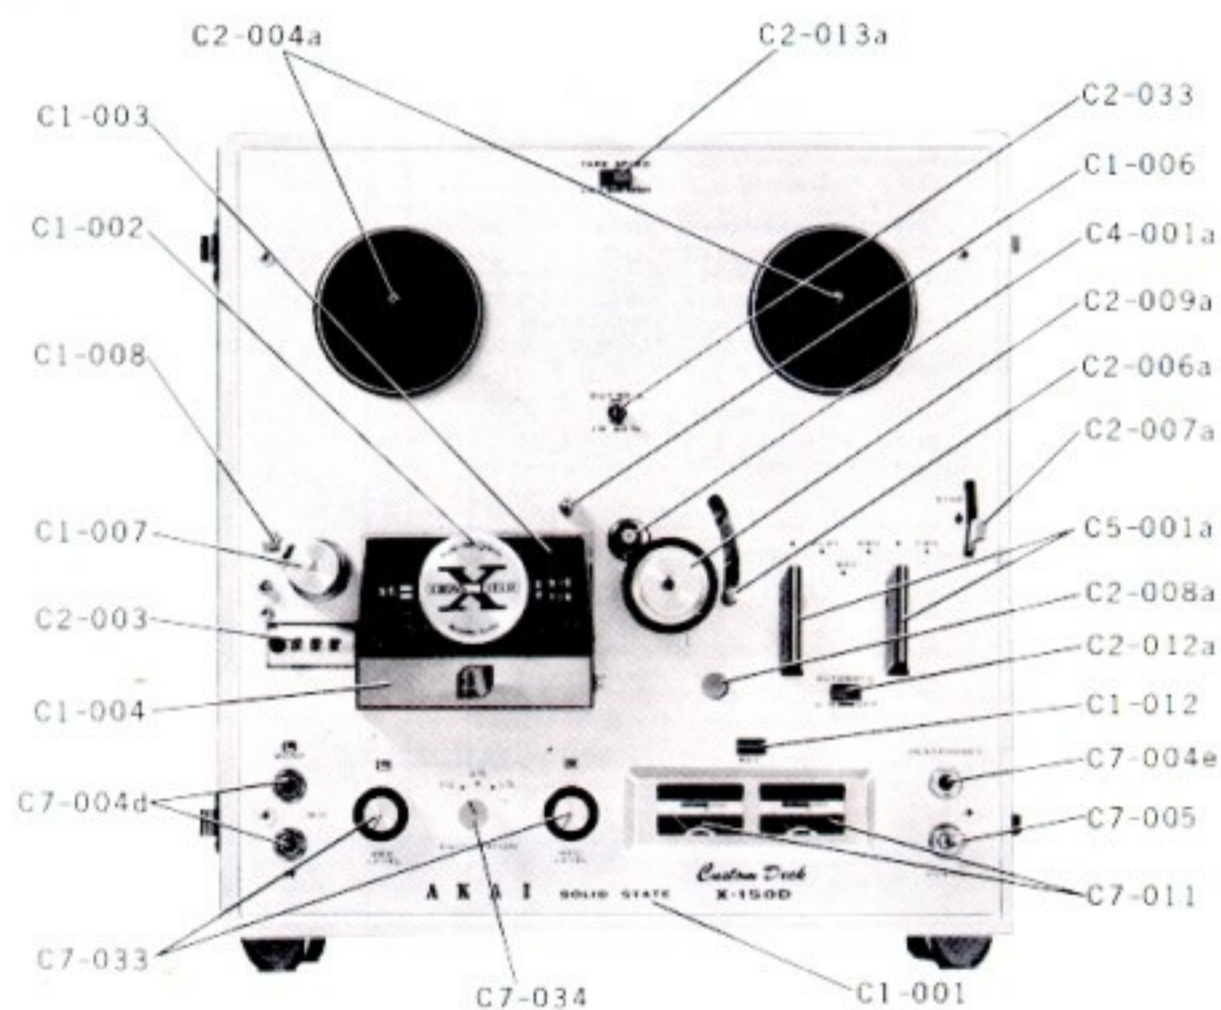



AMPLIFIER - 1

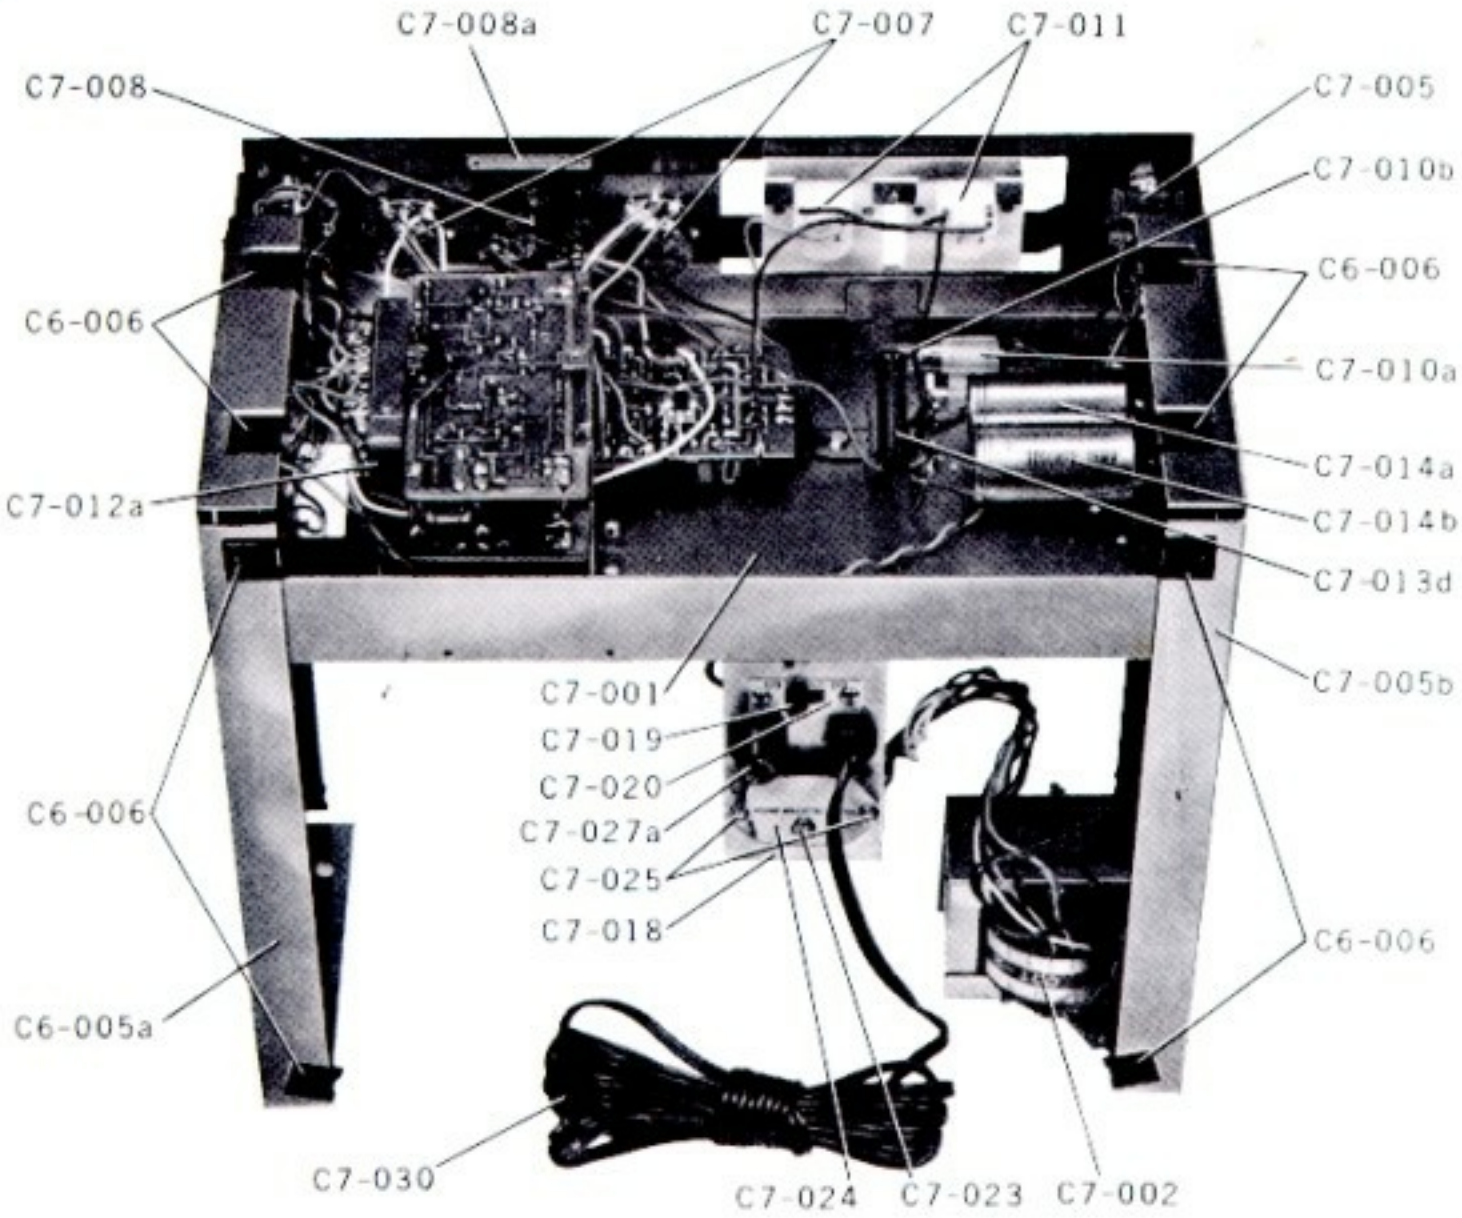



AMPLIFIER - 2

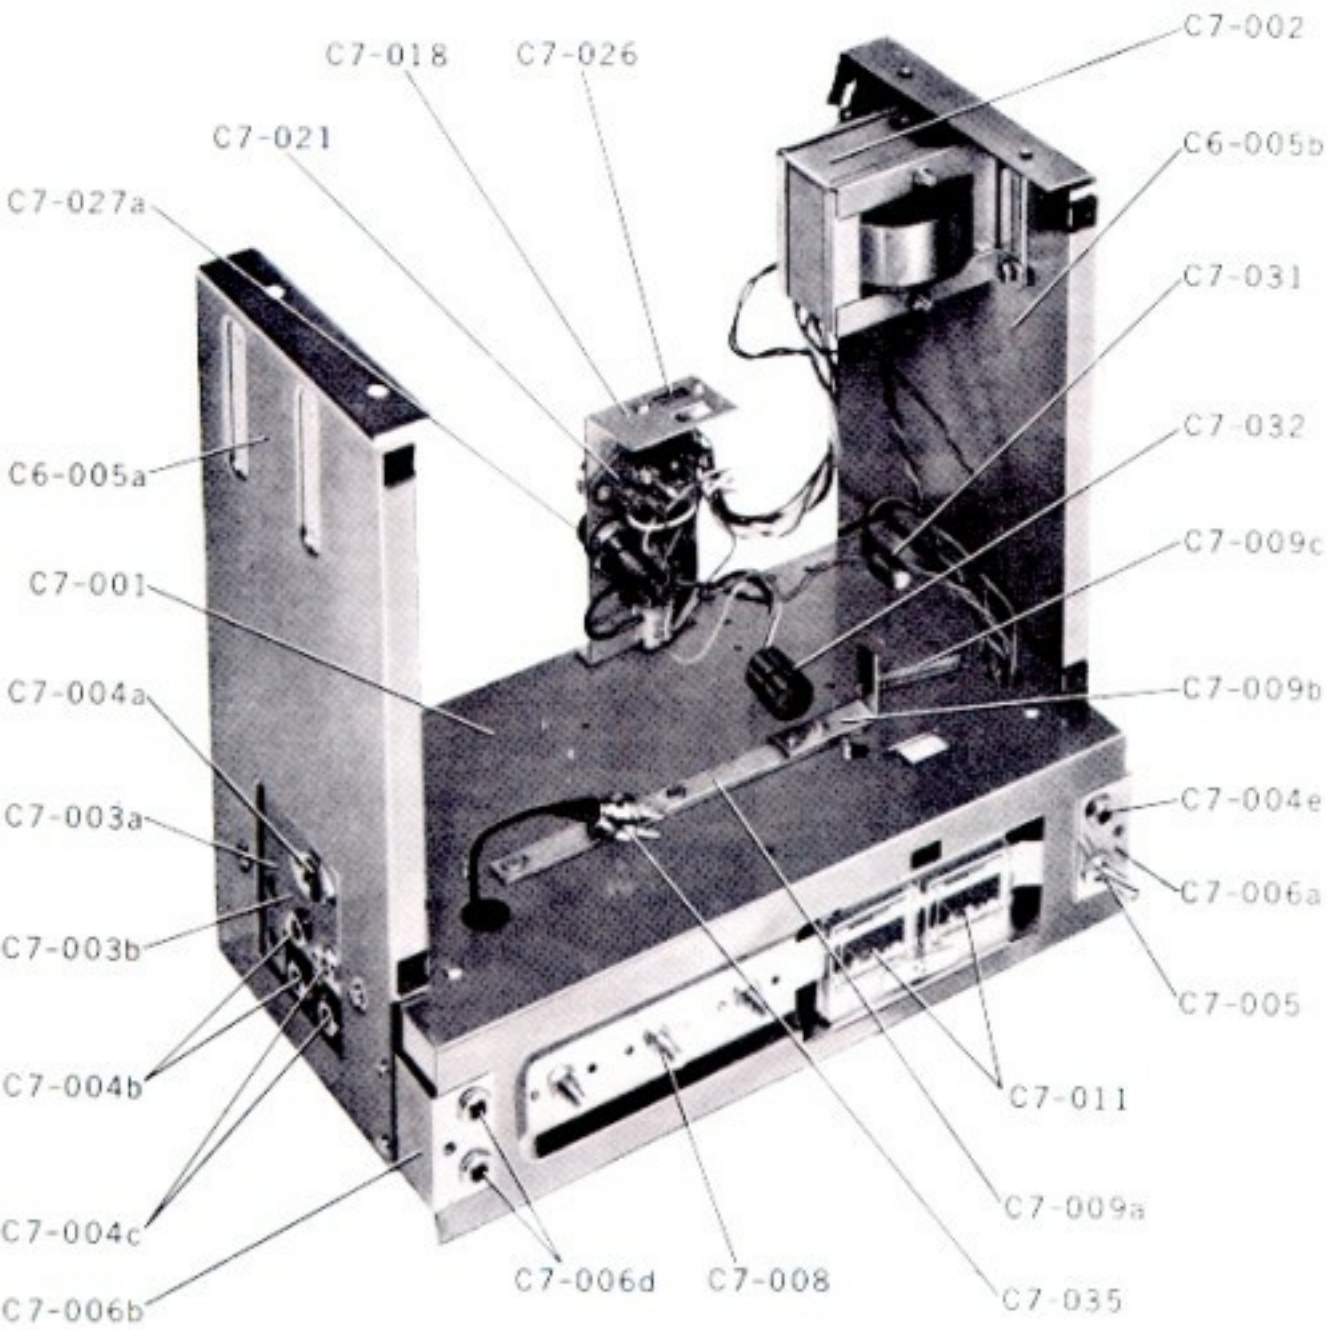



Card Block - 1

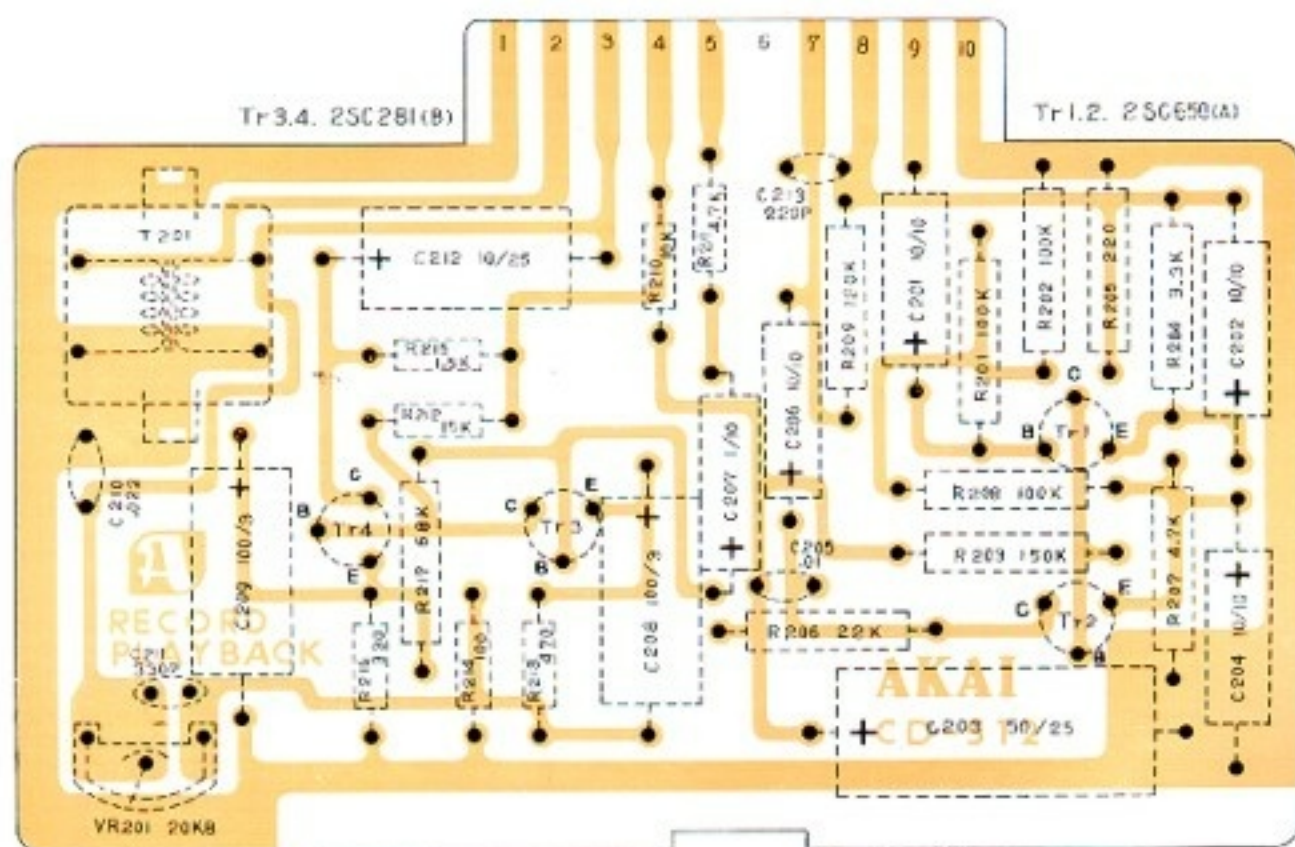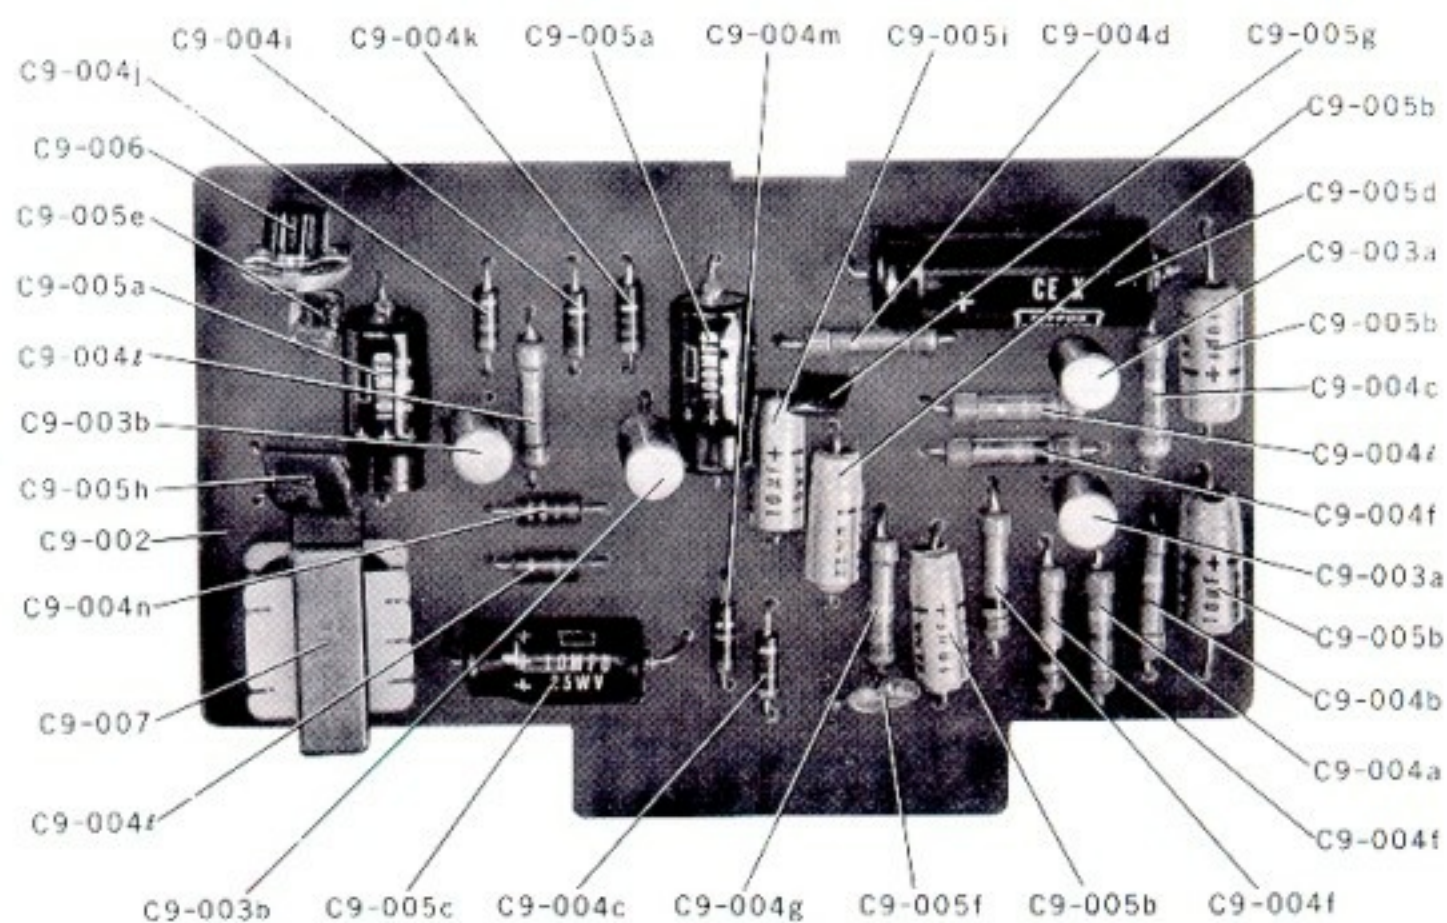

Card Block - 2

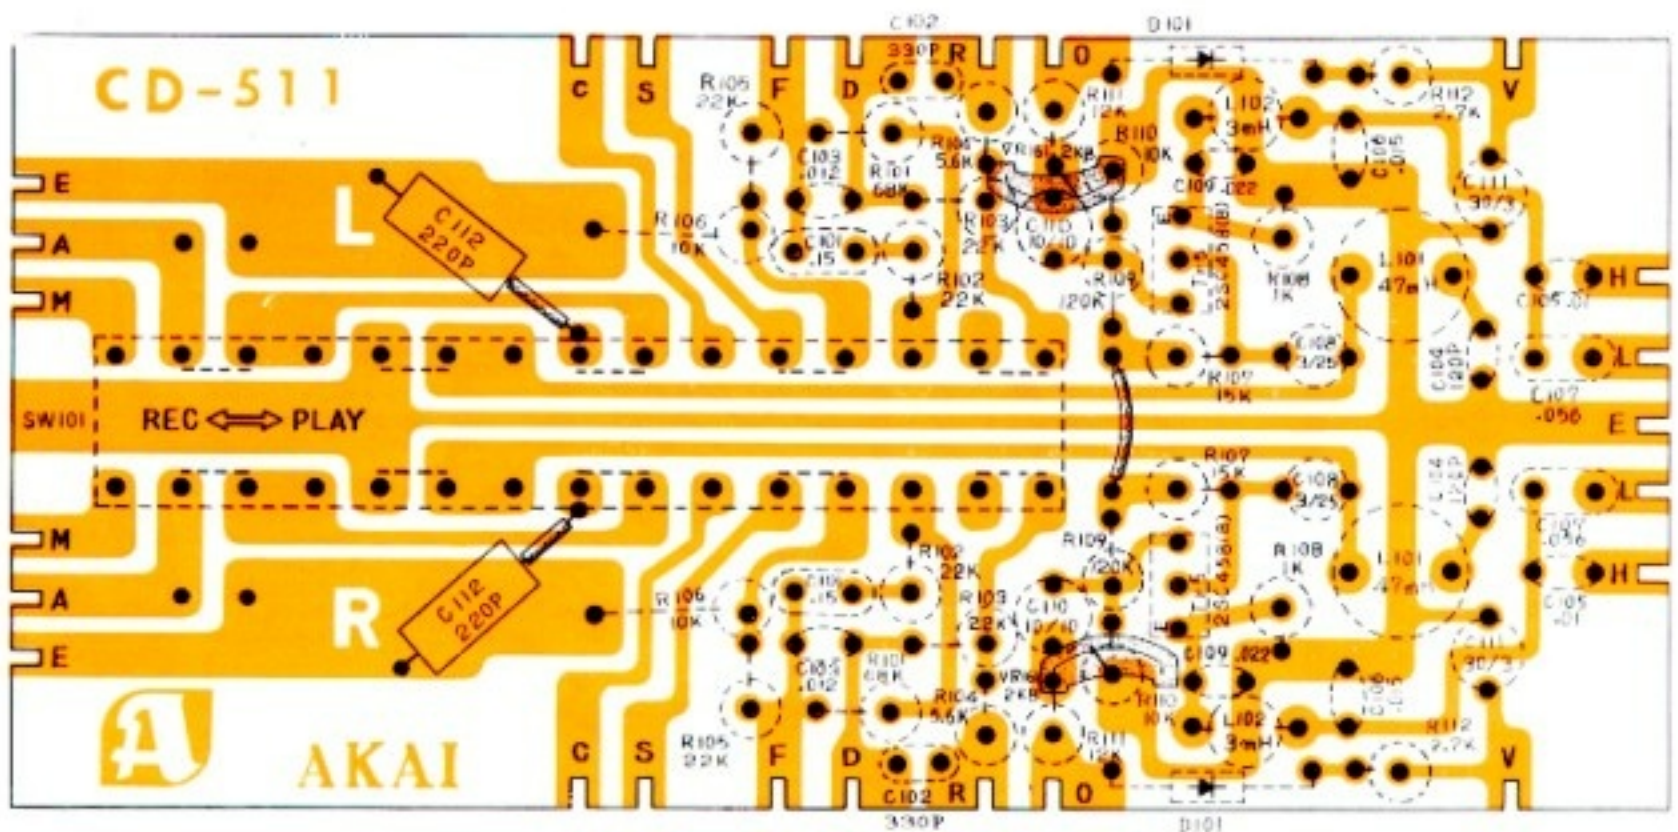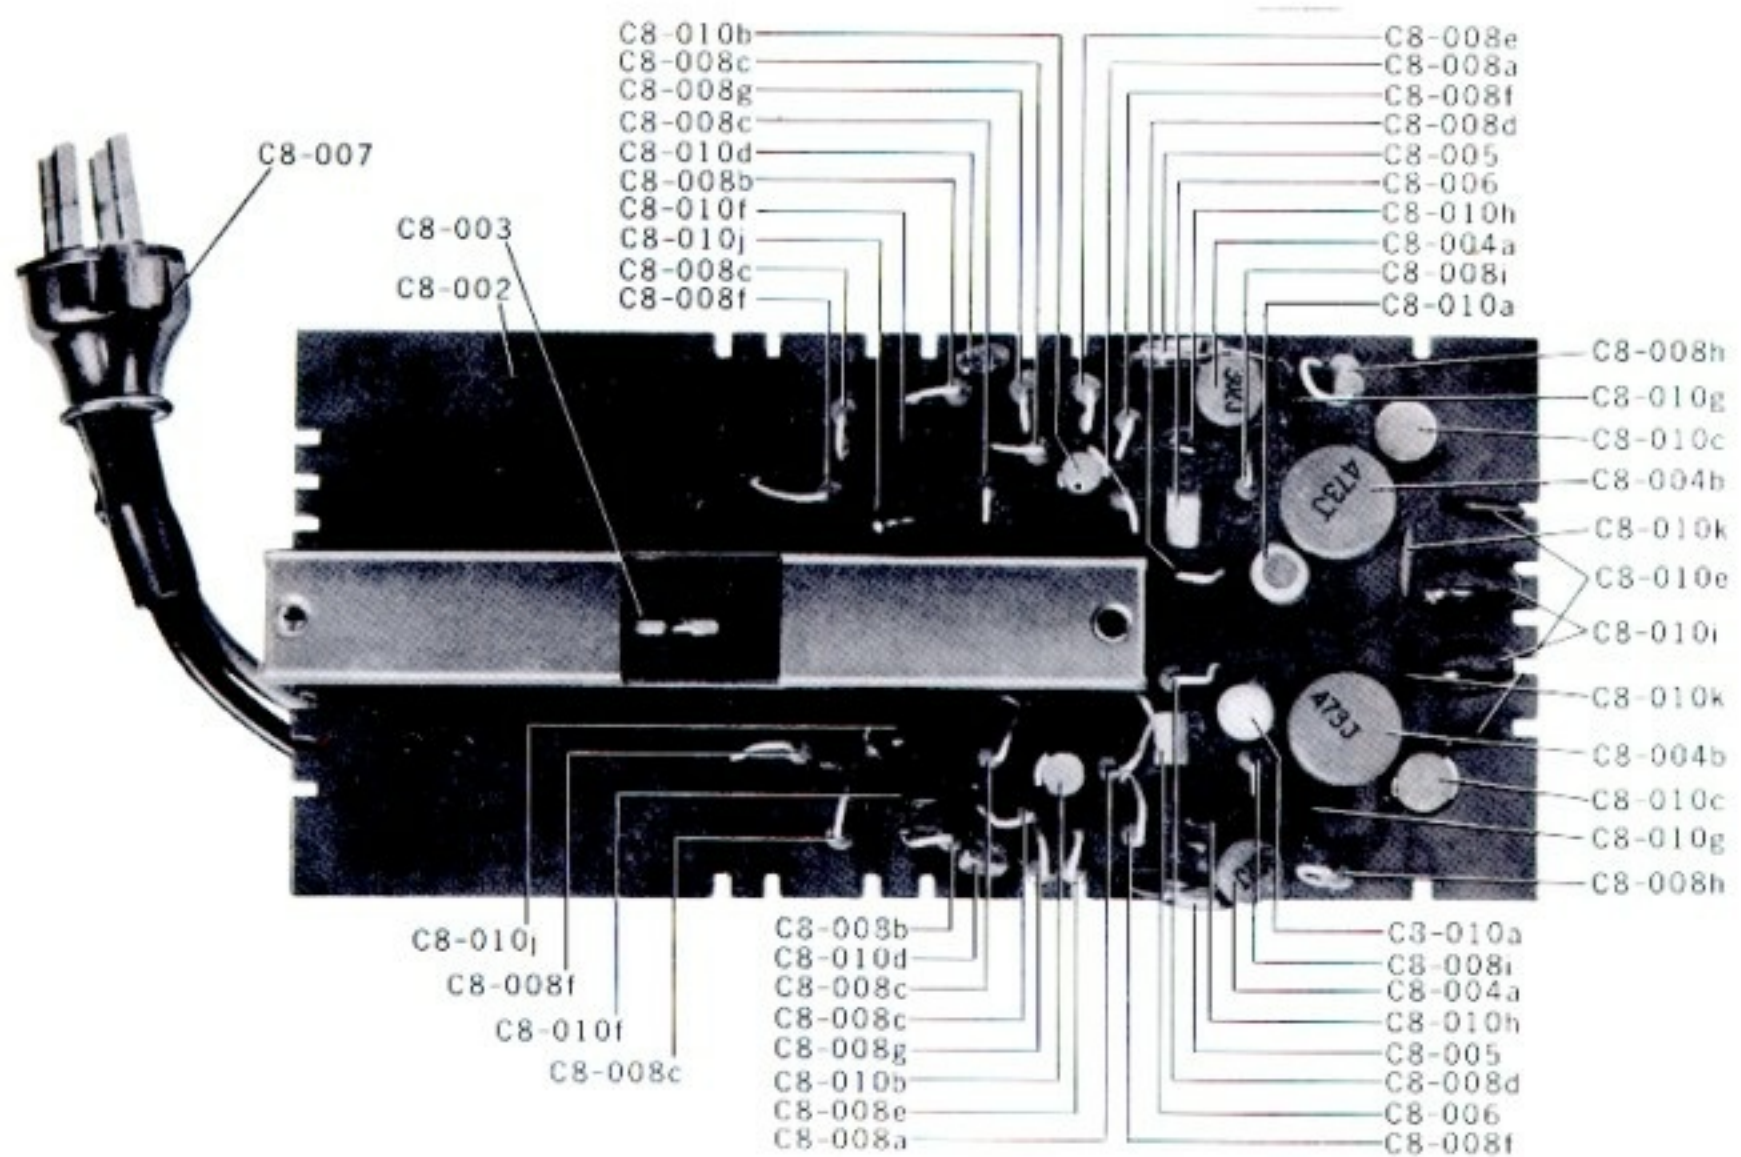

Card Block - 3

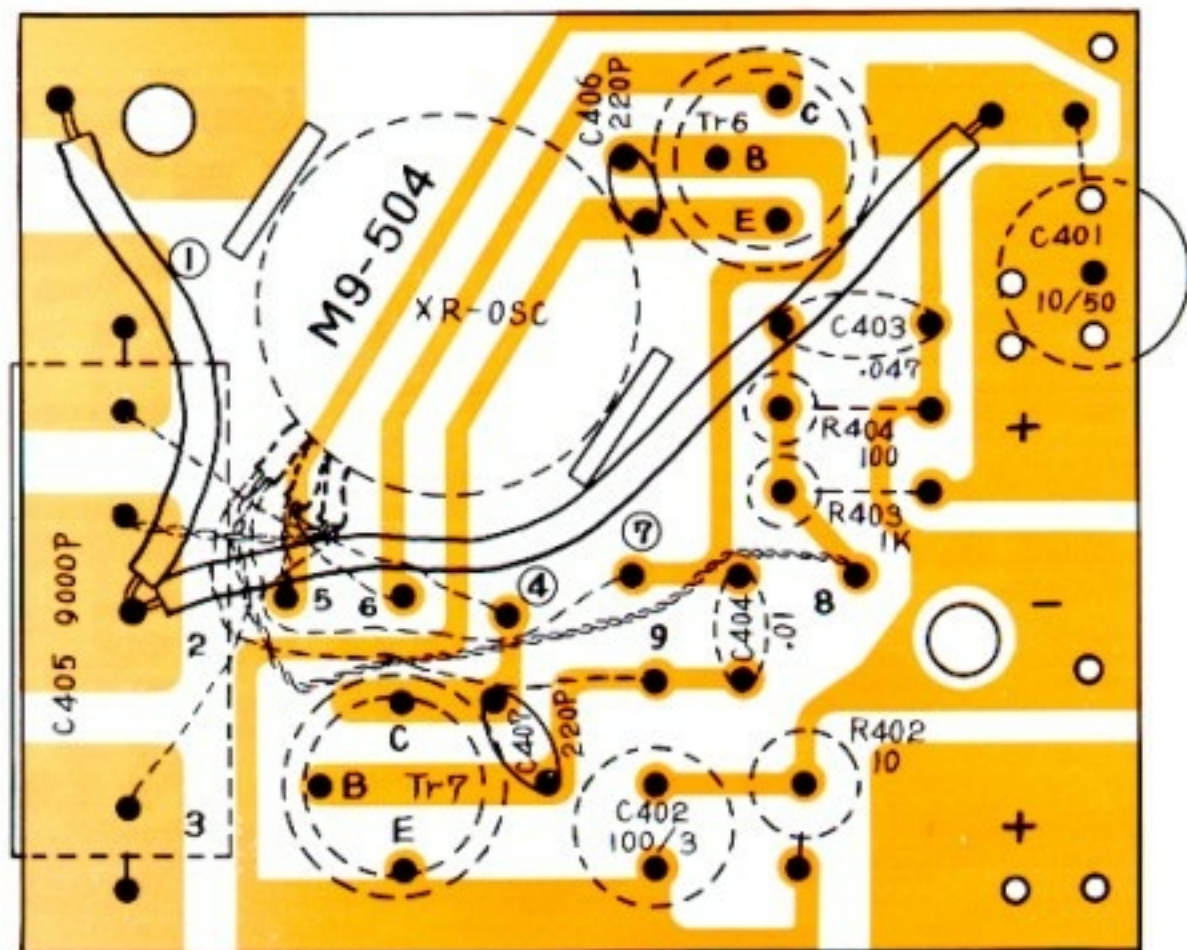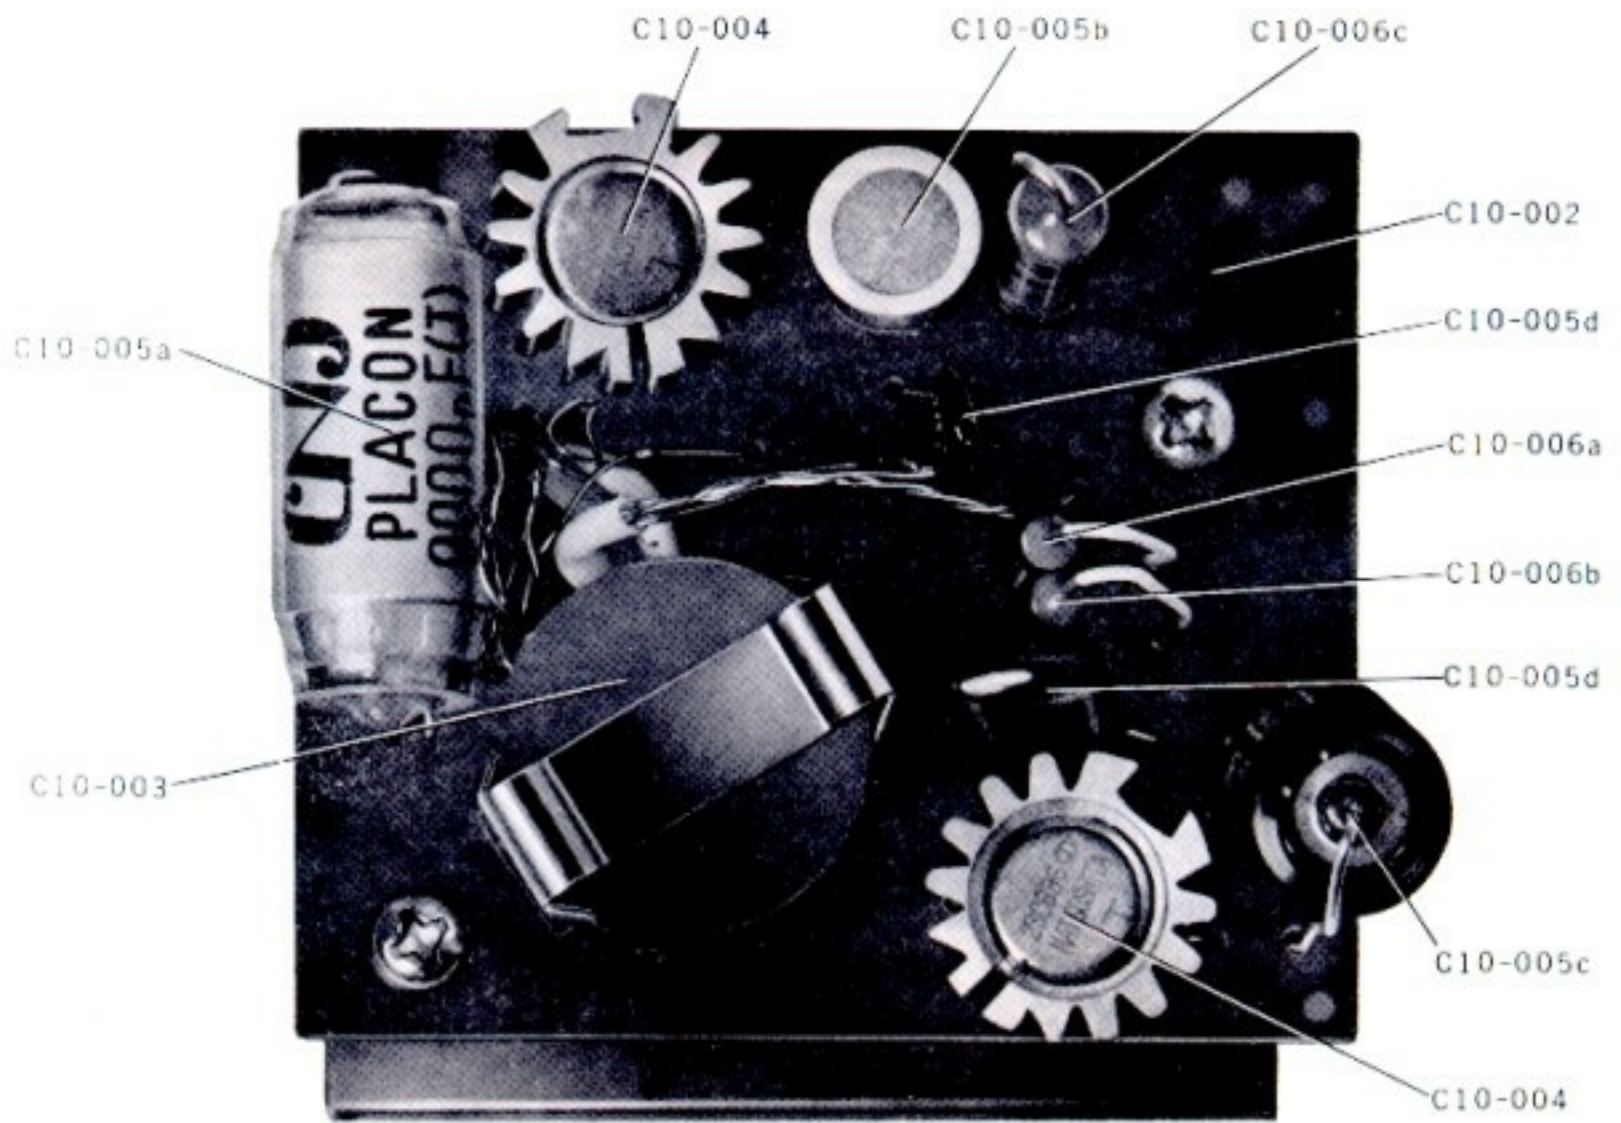


Tr 6, 7. 2SC696(J)(IXF)


XI. TROUBLE SHOOTING CHART

SECTION "A" TROUBLES WITH AMPLIFIER

1. Playback problems. (Unit set in play position.)

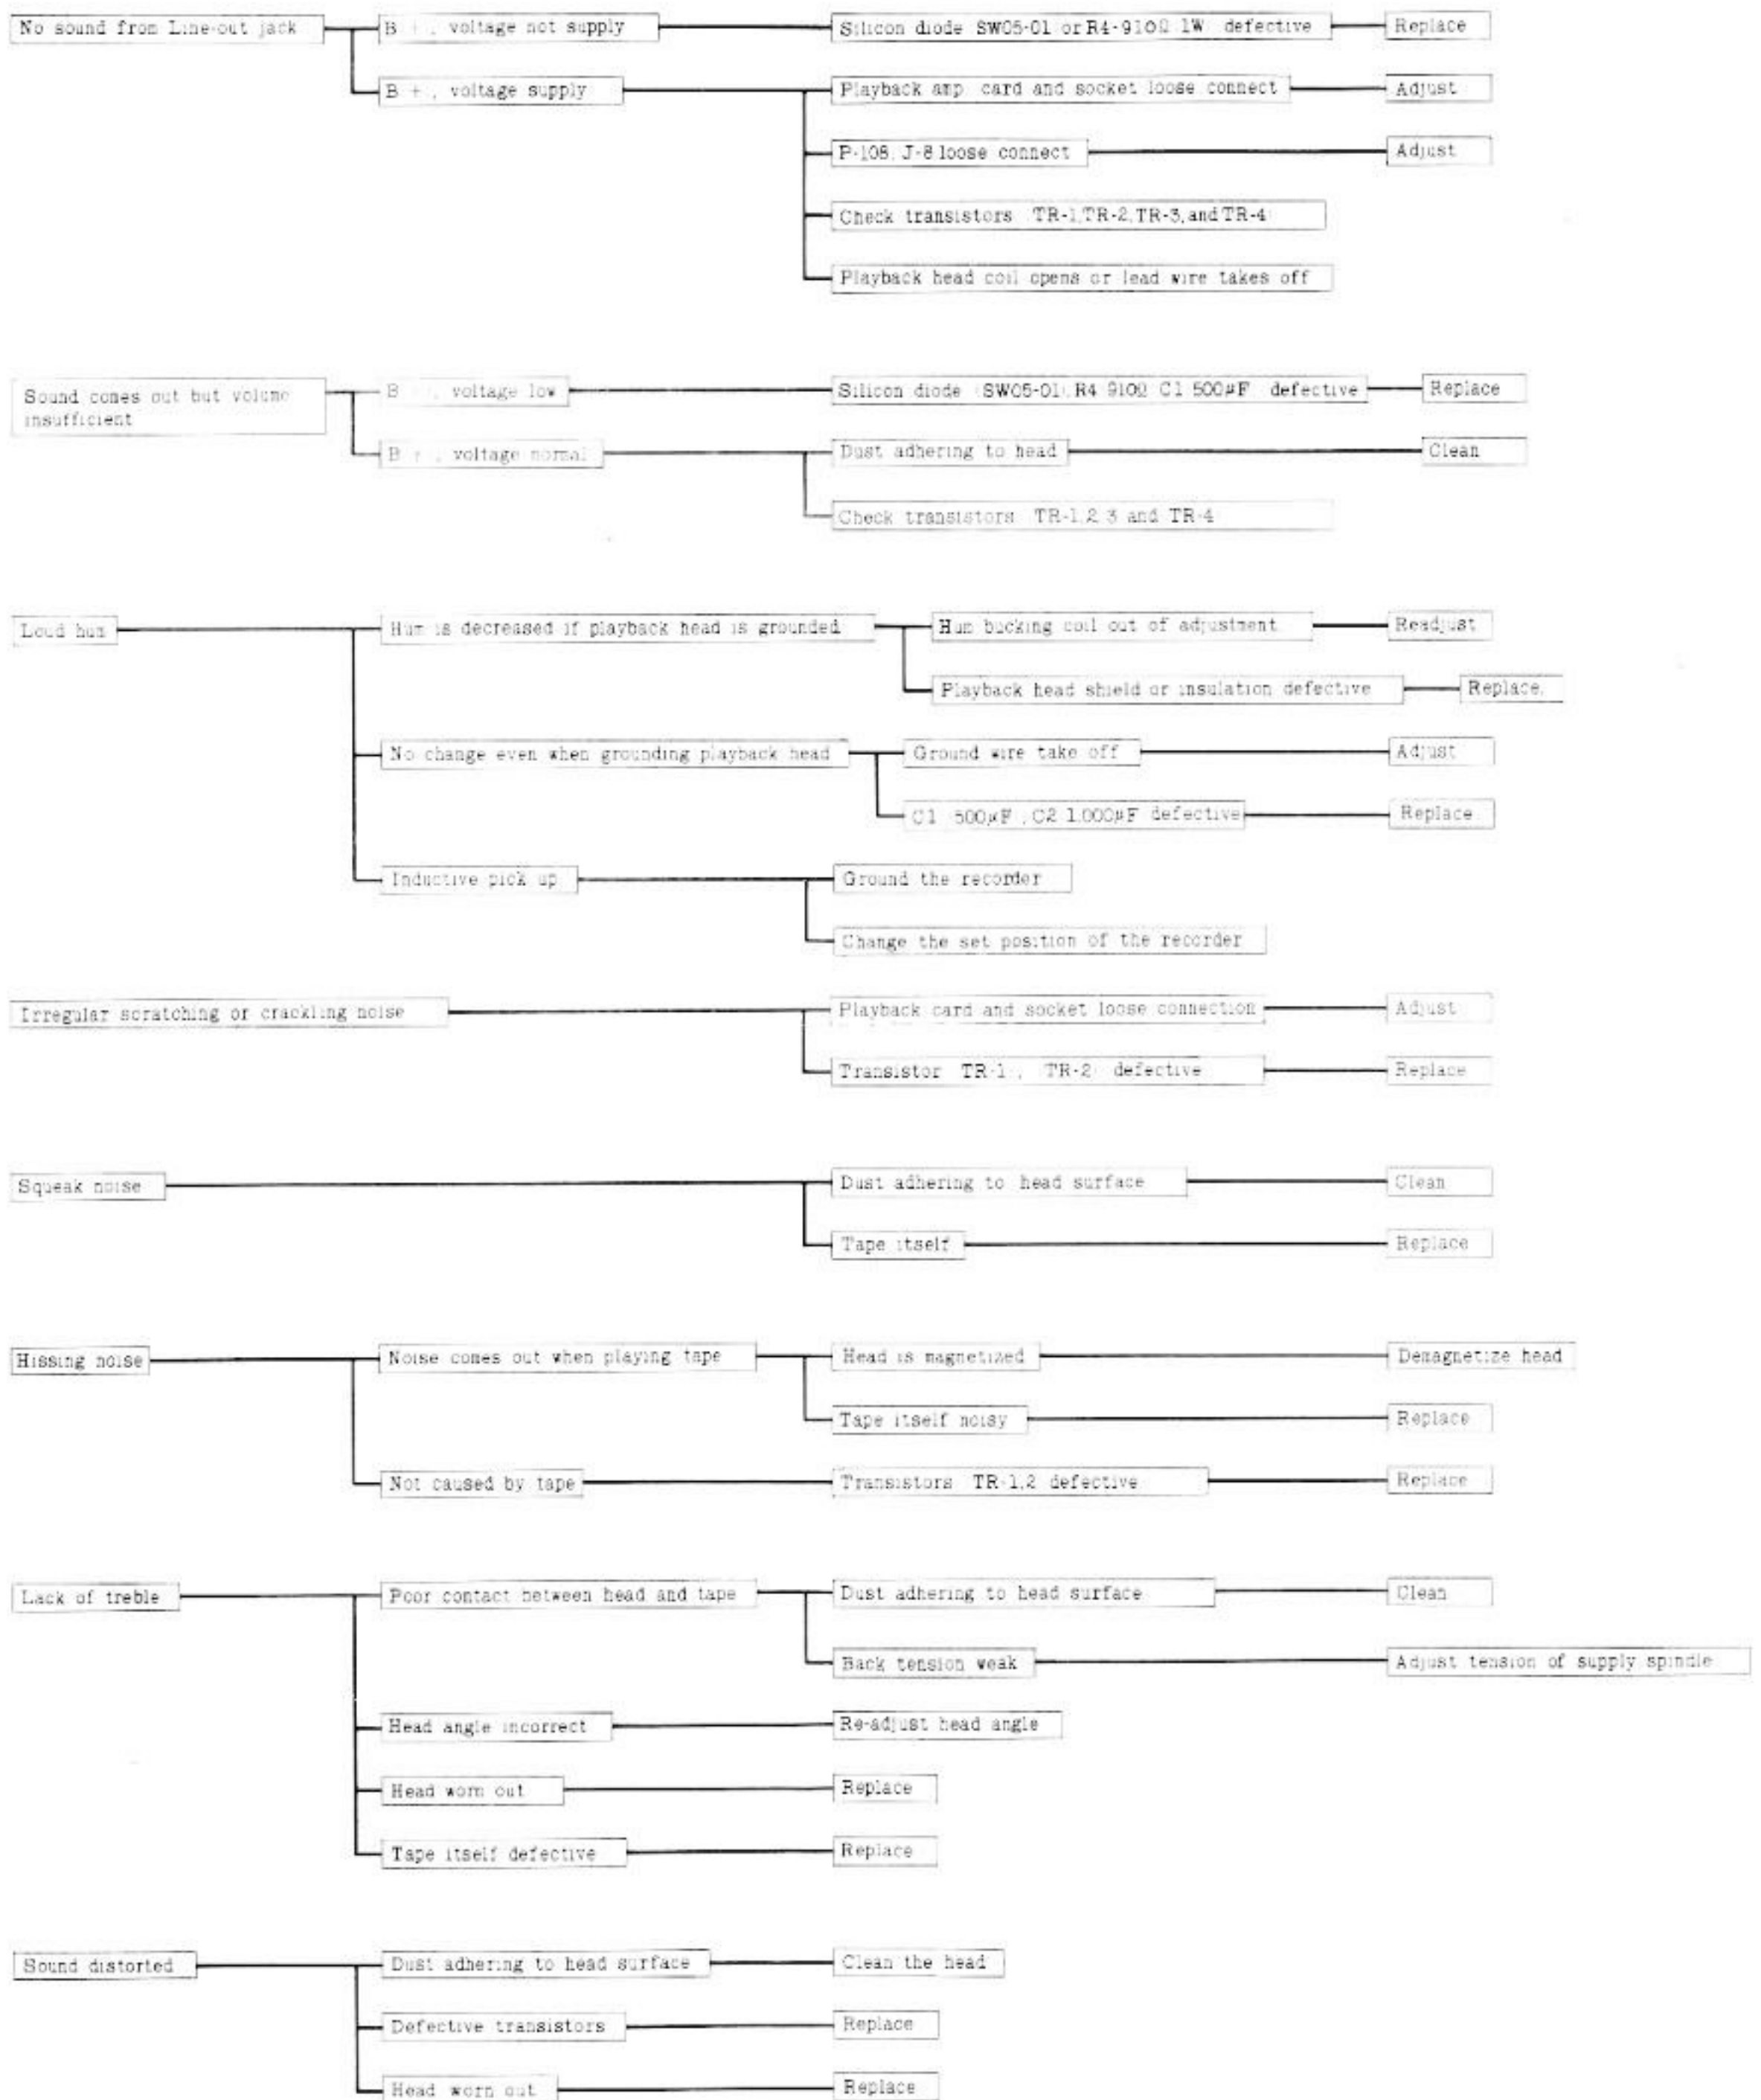


2. Recording problems.
(Unit plays back pre-recorded tapes okay, but recording not satisfactory.)

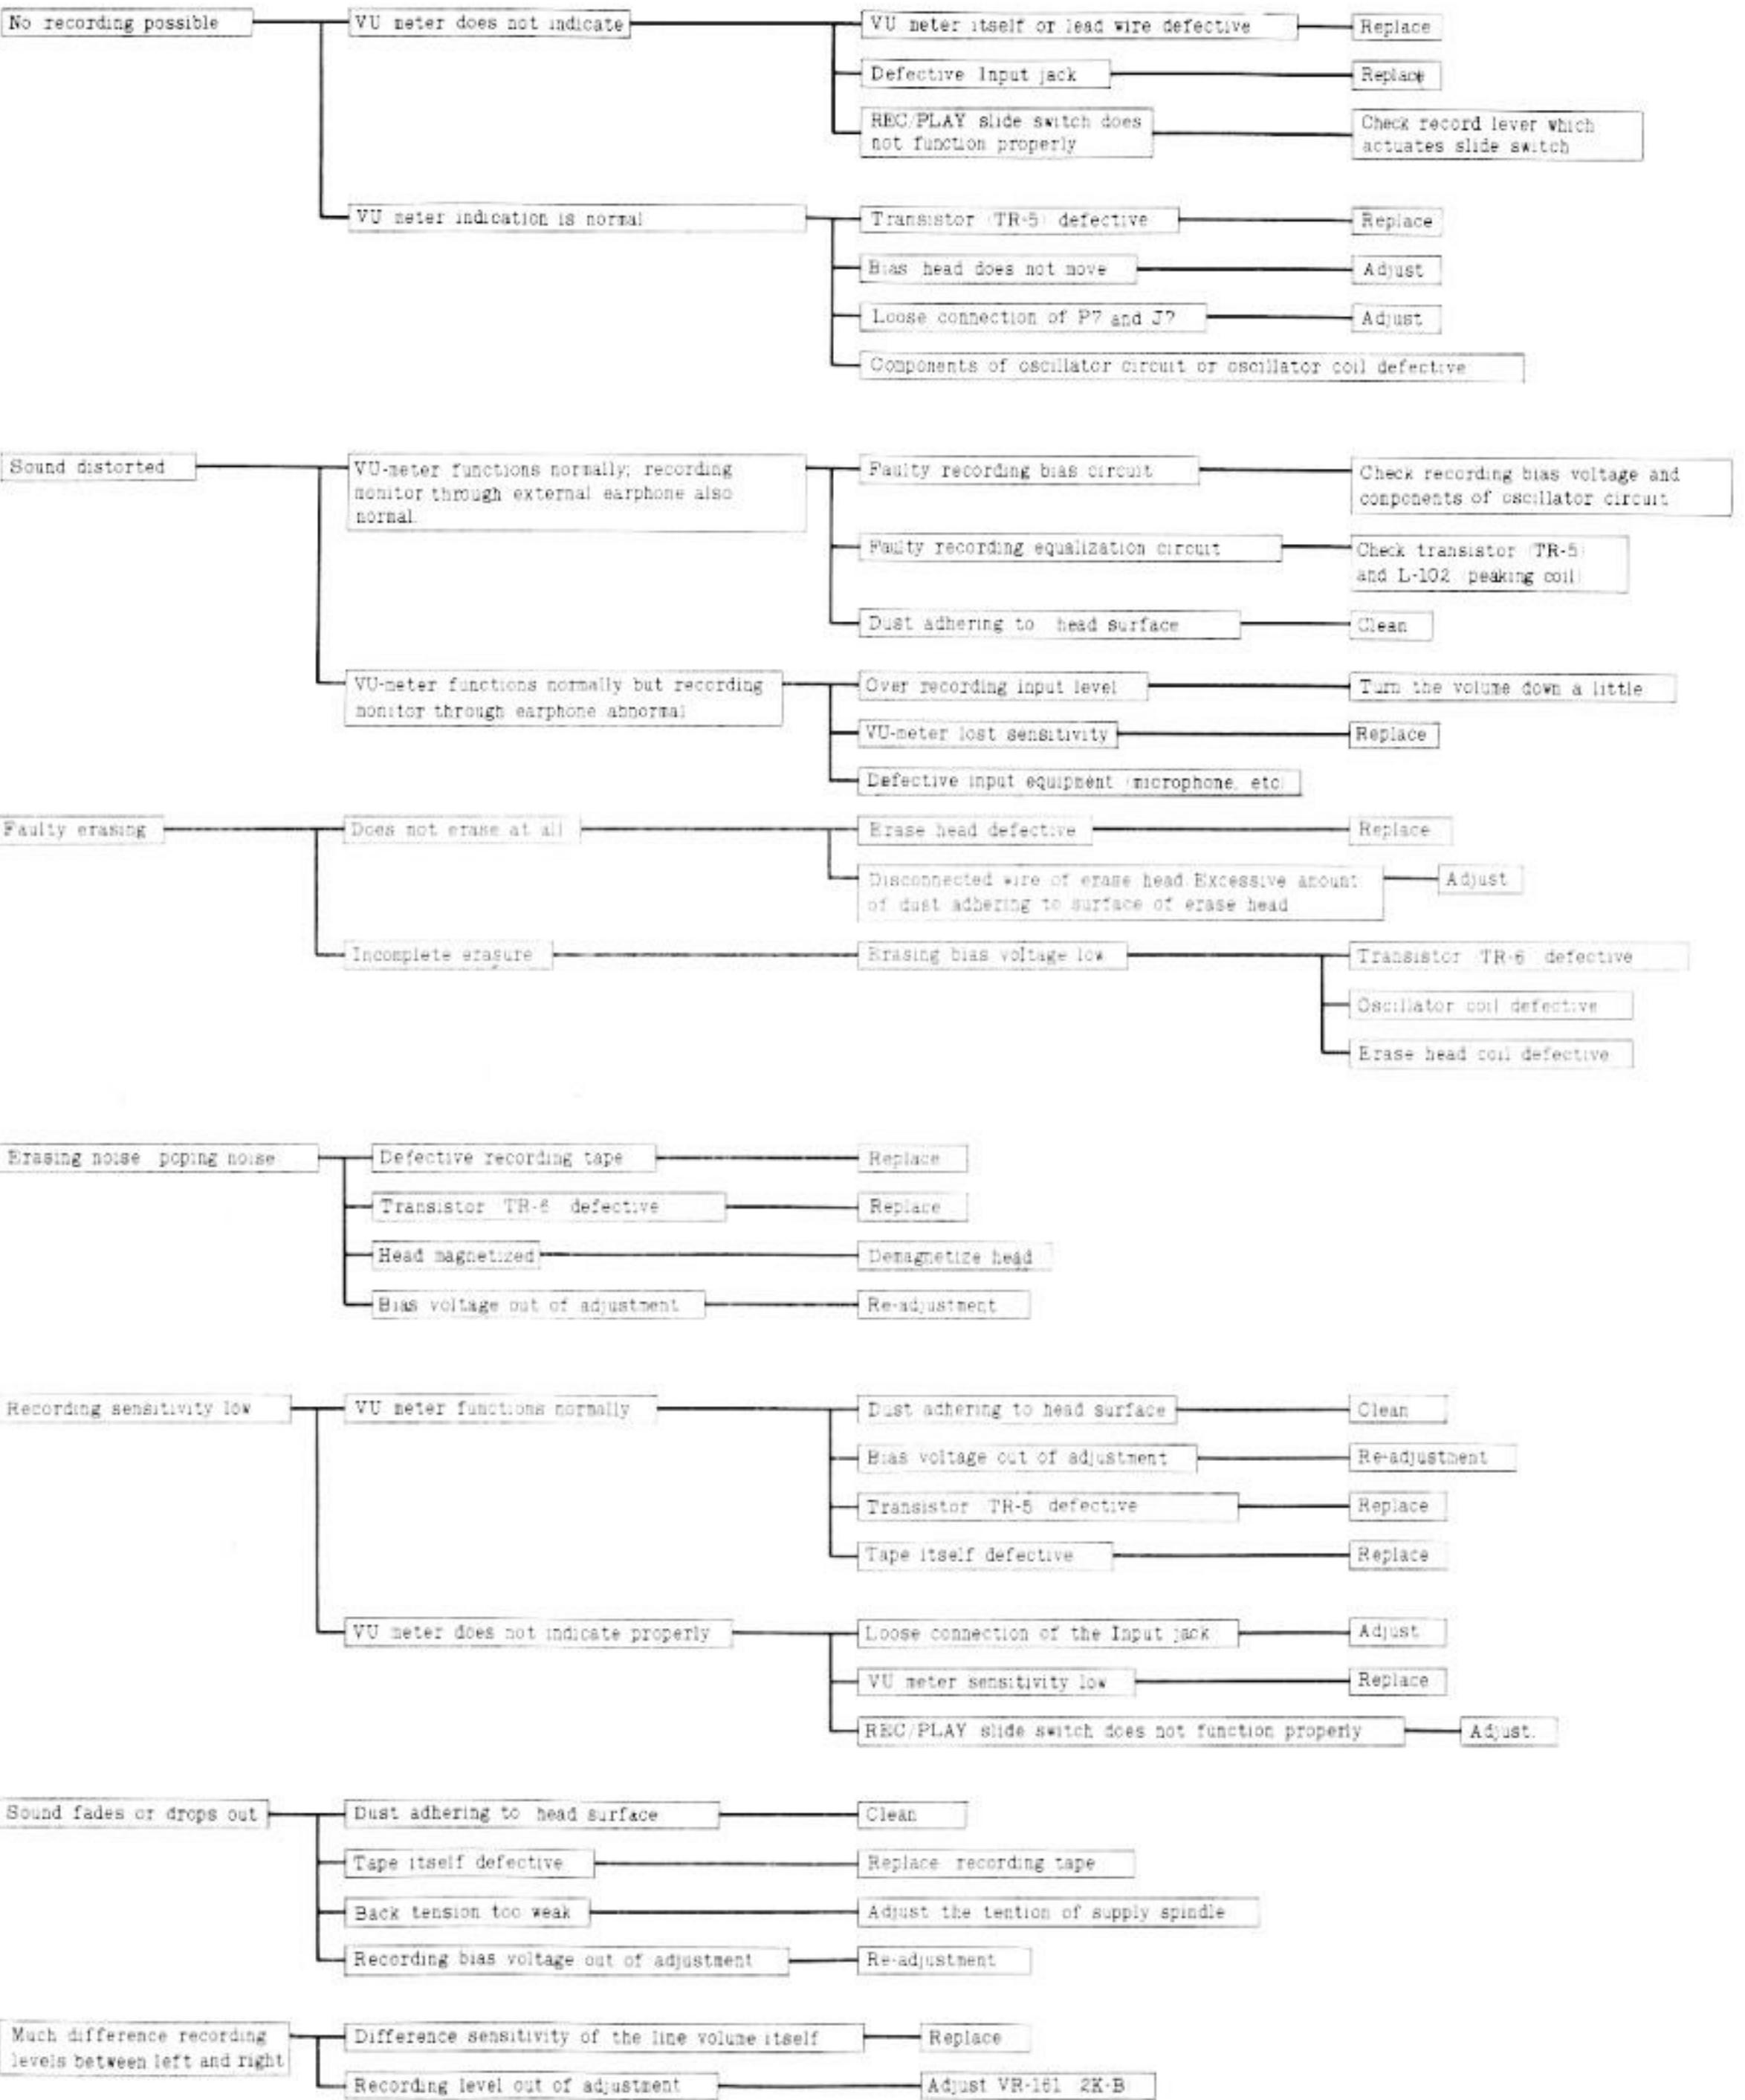

SECTION "B" TROUBLES WITH TAPE TRANSPORT MECHANISM.



SECTION "B" TROUBLES WITH TAPE TRANSPORT MECHANISM.

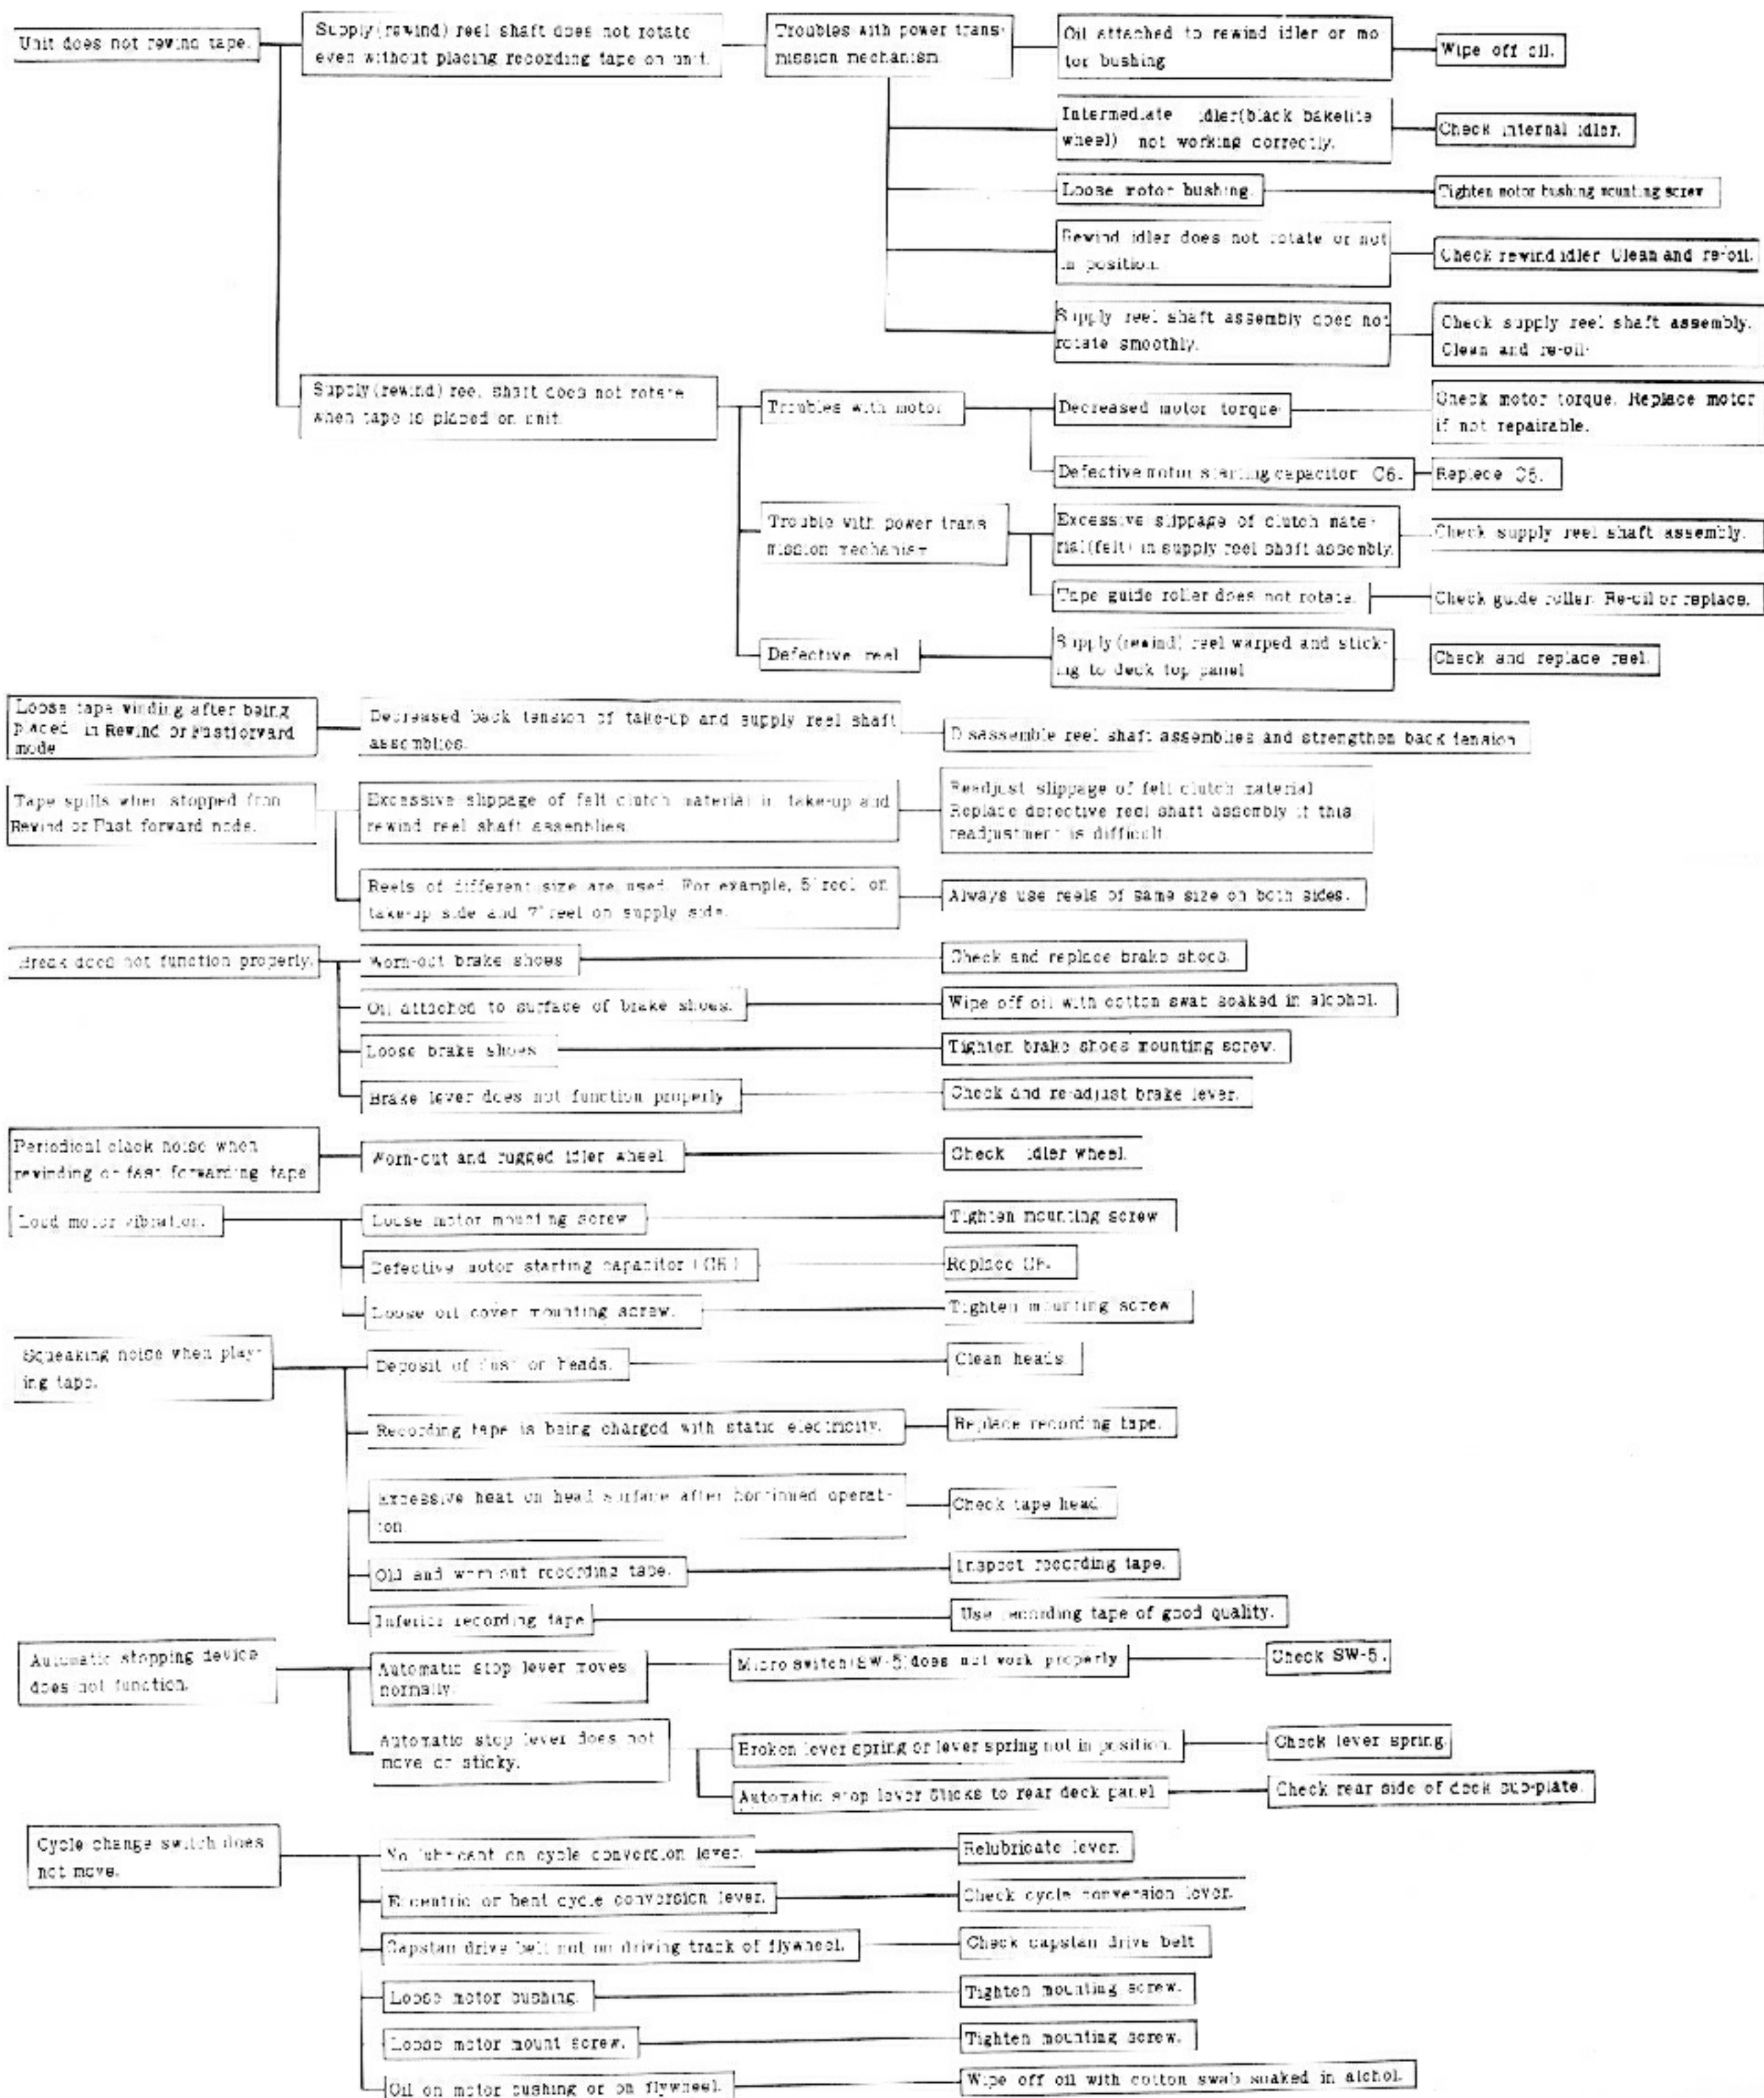

XIII. CONNECTING DIAGRAM

